

UltraMax™ 18 Electric Series

E20-18

The UltraMax 18 is one of the biggest and most powerful fryers on the market. Fast recovery during heavy use is why the UltraMax 18 series is perfect for bone-in chicken, and large-volume french fries, onion rings, tenders, wings, and seafood.

Increase production and choose from a range of options to suit your needs.

The UltraMax 18 series occupies the middle ground: not too big or too small.



Optional Equipment Shown

STANDARD FEATURES

- Thermostat controls
- Total stainless steel construction
- Heavy-duty casters

ACCESSORIES

- Vat joiner strips to join 2 or more fryers
- Splash guard (left side and/or right side)
- Vat cover

OPTIONS

- UltraStat™ 23 controls
- UltraStat™ 402 touchscreen controls
- UltraClear™ Filtration
- UltraClear™ Plus Filtration
- UltraSense™ Oil Management

Project _____

Item _____

Quality _____

Approval _____


Date _____



Ultrafryer
Systems

UltraMax™ 18 Electric Series

F-E20-18

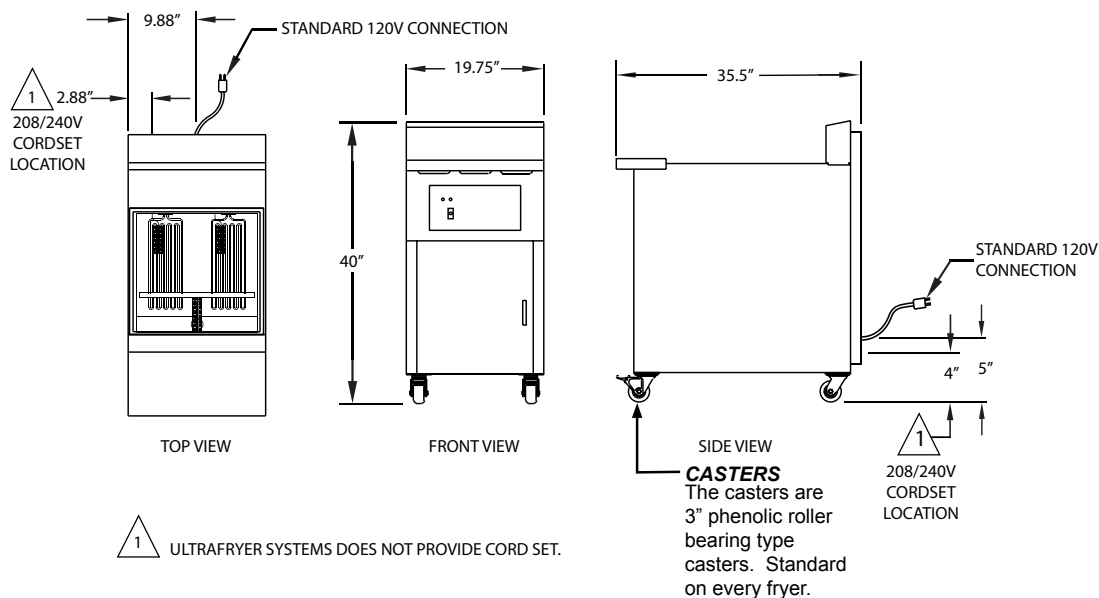

Sales ID#	Oil Capacity	Overall Size (H x D x W)	Nominal Vat Size	Net Weight	Shipping Info
F-E20-18	75 lbs. per vat (36 liters)	40" x 35.5" x 19.75" (1016 x 902 x 502 mm)	18" (457 x 457mm)	275 lbs (125 kgs)	F.O.B. Factory San Antonio, Texas

Determined in accordance with ASTM F1361-91 Standard Test Method for the performance of open vat fryers. Energy input rating 20 (min. kW) min.


CONTROL ELECTRICAL REQUIREMENTS

Controller R120V, 60 HZ, 1 Phase, 8.5 amps
Electrical cord is 6' long and located on RH side in rear. (control circuit)

ELECTRICAL SPECIFICATIONS

Model	Voltage 60HZ	Phase	kW	Amps
18"	208	3/3w	20	56 per vat
	240	3/3w	20	48 per vat


HEATING ELEMENT & VAT CONFIGURATION



Electric



Flat Bar Element



1 to 6 vats

© 2017 Ultrafryer Systems, Inc. Due to continuing engineering development and improvements, specifications are subject to change without notice.
Ultrafryer Systems, Inc. is a wholly owned subsidiary of Standex International Corporation. Revision date: 3.15.2018

Ultrafryer
Systems