



MODEL: P30-18

75 lb. High Efficiency/High Production Gas Fryer

Standard Features:

- High efficiency Par-3 heat exchanger
- 75 lb shortening capacity
- Dial thermostat inside cabinet
- Stainless steel vat, cabinet and frame
- Pilotless electronic ignition
- Heavy duty casters with front locking brakes
- 2 baskets
- Drain cleaning rod and vat cleaning brush

Options and Accessories:

- 2 product Ultrastat computer controller
- 10 product Ultrastat computer controller
- Vat joiner strips to join 2 or more fryers
- Splash guard (left side and/or right side)
- 3/4" x 48" gas quick disconnect
- Vat cover



Project _____

Item _____

Quality _____

Approval _____

Date _____

Specifications

Designed to meet high production frying needs with low energy cost

The Ultrafryer® Systems P30-18 is a floor model fryer designed to meet high volume frying needs while providing the maximum in energy savings. The P30-18 has a cooking efficiency of 61.1%. The fast recovery of the Ultrafryer® P30-18 shortens cooking time and reduces shortening absorption. Pilotless electronic ignition and dial thermostat allow for accurate temperature control and ease of operation. The Phased Array Heat Exchanger provides a large surface area and extended path of travel for the combustible gases ensuring fast recovery, uniform heat distribution and low exhaust temperatures of 500 degrees or less.

The P30-18 cabinet and door are fabricated from high quality stainless steel to ensure a long service life.

The P30-18 is equipped with a screw-in front drain pipe for easy shortening filtration and/or disposal.

The P30-18 has a maximum shortening capacity of 75 lbs.(36 liters). The cooking zone is 18" x 18" (457mm X 457mm) with shakezone and a 7" drainboard.

The P30-18 is rated 110,000 BTU/h.



www.ultrafryer.com


Ultrafryer® Systems, Inc. • 302 Spencer Lane • San Antonio, TX 78201 • (800)545-9189 • (210)731-5000 • FAX (210)731-5099




MODEL: P30-18

75 lb. High Efficiency/High Production Gas Fryer


**Patented PAR3
Gas heat exchanger
w/ vortex boxes**

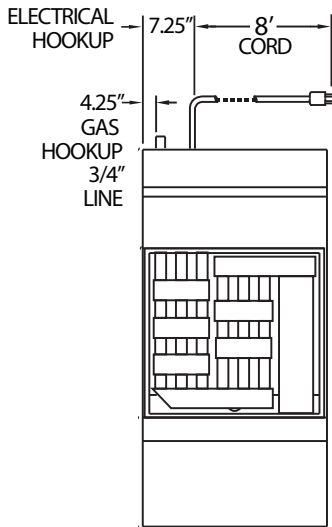

TOP VIEW

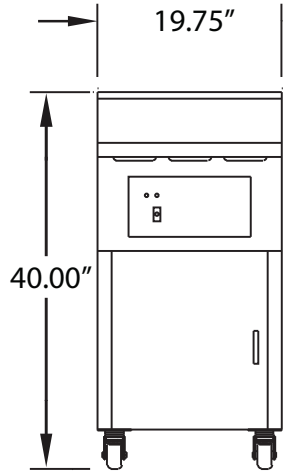

FRONT VIEW

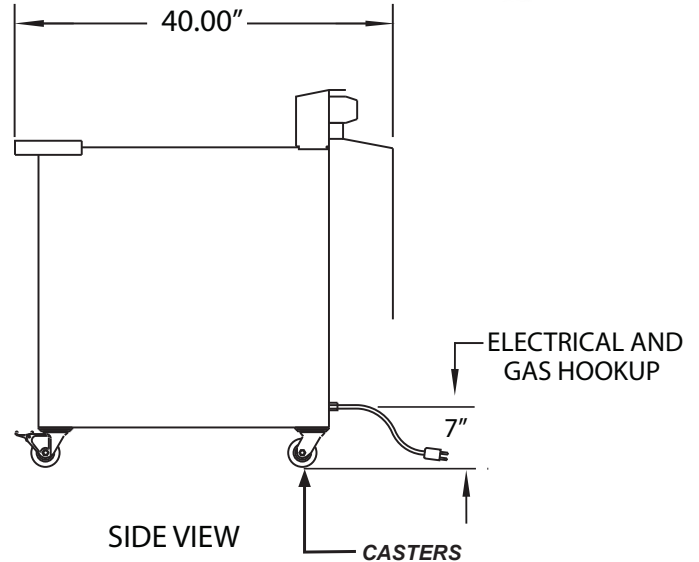

SIDE VIEW

CASTERS
The casters are 3" phenolic roller bearing type casters. Standard on every fryer.

Sales ID#	Shortening Capacity	Overall Size			Drain Height	Net Weight	Shipping Info
		Height	Depth	Width			
F-P30-18	75 lbs. per vat (36 liters)	40" (1016mm)	40" (1016mm)	19 3/4" (502mm)	18" (458 kg)	275 lbs (125 kg)	F.O.B. Factory San Antonio, Texas

ELECTRICAL REQUIREMENTS FOR OPERATING SYSTEM:

120 V, 60 HZ, 1 phase, 3.0 amps.

GAS INLET PRESSURE PER VAT REQUIRED:

7" water column natural gas
14" water column propane/butane

PERFORMANCE SPECIFICATIONS:

Determined in accordance with ASTM F 1361-91 Standard Test Method for the performance of open deep fat fryers:

- Nominal Vat Size:** 18" (508mm x 508mm)
- Energy Input Rating:** 110,000 BTU/hr (116 megajoules)
- Shortening Capacity:** 75 lbs. (34 liters)

Due to continuing engineering development and improvements, specifications are subject to change without notice. © February 22, 2017 Rev A Ultrafryer® Systems, Inc.