



18" MODEL PAR-3-H CE GAS FRYER
WITH HARD DOCK FILTRATION

Operating Instructions



THIS APPLIANCE IS FOR PROFESSIONAL USE AND IS TO BE USED ONLY BY QUALIFIED PERSONNEL

302 Spencer Lane • P.O. Box 5369
(800) 525-8130 • (210) 731-5000 • Fax: (210) 731-5099
www.ultrafryer.com

San Antonio, Texas 78201

30A227 July 2009

PREFACE

This Manual was written and published by the Engineering Department, Ultrafryer Systems for use by personnel who will operate a 18" Model PAR-3-H CE Gas Fryer equipped with a Hard Dock Filtration System in a commercial cooking environment.

ENGINEERING DEPARTMENT
ULTRAFRYER SYSTEMS
302 SPENCER LANE
SAN ANTONIO, TX 78201

THIS APPLIANCE IS INTENDED FOR PROFESSIONAL USE AND IS TO BE OPERATING BY QUALIFIED PERSONNEL

Throughout this manual Notes, CAUTIONS and WARNINGS are used to alert the operator to items of special circumstances. These items are identified as follows:

NOTES
These Items will be indented from the main text, the word “NOTE” will be in capital letters. These items alert the operator to items of special concern to achieve a desired result.

Example:



NOTE: Pull on the filter tub to ASSURE the male docking plug is SEATED in the female bulkhead socket.

CAUTIONS: These items will be indented from the main body of text, the word “CAUTION” will be in bold, capitalized print and the entire text will be enclosed by a border. These items identify steps or procedures that if not adhered to could result in product, equipment malfunction or failure.

Example:



CAUTION: TO ASSURE PRODUCING A QUALITY PRODUCT WHILE PROLONGING THE LIFE EXPECTANCY OF THE FRYER, ENSURE FILTERING, BOIL-OUT AND CLEANING INSTRUCTIONS ARE STRICTLY ADHERED TO.

WARNINGS
These items will be indented from the main body of text, the word “WARNING” as well as the text will be in bold, capitalized print and the entire text will be enclosed by a bold border. These items identify steps or procedures that if not adhered to could result in property damage, injury or death.

Example:



WARNING: DO NOT ALLOW ANY CLEANING SOLUTION OR WATER TO SPLASH INTO A VESSEL OF HOT COOKING OIL, AS IT WILL CONTAMINATE THE OIL AND MAY CAUSE THE OIL TO SPLATTER CAUSING SEVERE BURNS.



NOTE: This manual is applicable to Ultrafryer Model Par3 18H CE Gas Fryer.

TABLE OF CONTENTS

GENERAL INFORMATION PAGE

Preface Table of Contents i-iii

Safety. 1

Description / Specifications. 1

Operational Requirements. 1

Ultrastat 23 Cooking Computer. 2

Operating Controls Location. 2

Operating Controls. 3

Automatic Safety Features. 4

European Pressures, Gases & Categories Table. 4a-4c

Installation, start up, and Initial Cleaning 5

PRE-INSTALLATION

General 6

Rating Plate. 6

Clearances. 6

Standards. 6

Air Supply & Ventilation. 6

RECEIVING & INSTALLING

Unpacking 7

Installing. 7

Leveling. 7

Gas Connection 8

Electrical Connection. 8

INITIAL START-UP

Cleaning. 10

Start-Up. 10

Lighting Instructions. 10

Sequence Of Ignition. 10

Burner Operation Test. 10

Test Start-Up. 11

ABBREVIATED OPERATING INSTRUCTIONS

General 12

Filtering Shortening. 12

Leveling Shortening. 12

Boiling Out Fryer. 12

Closing / Shutdown Instructions. 12

PREVENTIVE MAINTENANCE & TROUBLESHOOTING

Preventive Maintenance 13

Troubleshooting. 13

Troubleshooting Chart. 14

TABLE OF CONTENTS.....Continued

CLEANING

General 15

Daily 15-16

Weekly 17

FRYER OPERATION

General 18

Ultrastat 23 Cooking Computer. 19

Computer Panel Key Descriptions. 20

Display Descriptions. 21

Ultrastat 23 Cooking Computer Operation. 22

Ultrastat 23 Cooking Computer Programming. 22

Cooking. 23

Ultrastat 23 Start-Up and Cooking Computer Operation. 23

FILTER TUB ASSEMBLY & INSTALLATION

Filter Tub Assembly. 24

Filter Tub Installation. 24

FILTERING & POLISHING SHORTENING

Filtering Shortening. 25-26

Polishing Shortening. 26

SHORTENING DISPOSAL, BOIL-OUT & REFILL

General 27

Shortening Disposal. 27

Boil-Out. 27-28

Shortening Refill 28

TECHNICAL ASSISTANCE & ORDERING INFORMATION

Technical Assistance. 29

Ordering Information. 29

PARTS IDENTIFICATION

Parts Identification. 30-34

WIRING DIAGRAM. 35

GENERAL INFORMATION

A. SAFETY

As with all deep Fat Fryers the major safety concern associated with the Ultrafryer Par3-18 CE Gas Fryer is burns from hot shortening. In order to prevent serious burns, good housekeeping habits are required. The floor in front of and the area around the fryer should be kept clean and dry. Whenever anything is placed in to a fryer vat, care should be used not to splash the hot shortening. Product should always be “PLACED” into the shortening, NOT THROWN. Safety goggles, neoprene insulated gloves and an apron must be worn while filtering or boiling-out a fryer vat. Electrical controls on all Ultrafryer CE Fryers operate on 230 volts single phase electrical power. No adjustments or replacement of electrical controls should ever be attempted without first disconnecting electrical power. The fryer should never be operated with wet hands or while standing in water. To do so can result in serious electrical shock or death.



This appliance is for Professional use and is to be used only by Qualified Personnel

B. DESCRIPTION / SPECIFICATIONS

The Ultrafryer Gas Fryer is constructed from 16 & 18 gauge, stainless steel, and is equipped with an Ultrastat 23 Cooking Computer. In addition, the fryer is equipped with the NEWLY developed Hard Dock Filtration System that uses a stainless steel Filter Screen. The Customer has the option of ordering a Magnepad Filter Screen that uses a Magnesol impregnated Filter Pad or a Paper filter pad in lieu of the S/S filter screen. The dimensions, specifications and gas ratings are as follows:

SPECIFICATION ITEM	18" PAR-3-H CE
Overall Width	19.625" (498 mm)
Overall Depth	30.75" (781 mm)
Work Height	35.75" (908 mm)
Size Vat Container	18" x 18" (457 x 457 mm)
Shipping Cube	12.0 FT3 (3.66 M3)
Shipping Weight	339 lbs (153.8 kgs)
Power Input	230 Volt 6 Amp 50 Hz 1 Ø

C. OPERATIONAL REQUIREMENTS


MODEL PAR-3-18HE CE OPERATIONAL REQUIREMENTS

ITEM	PAR-3-18HE CE
Shortening Capacity High Level	75 lbs. (xxx liters)
Shortening Capacity low Level	75 lbs. (xxx liters)
Gas Valve Pressure Setting	See Note Below
Orifice Drill Size	See Note Below
Inlet Gas Pressure	See Note Below
Energy Input	230 V 6 AMPS 50 HZ 1 Ø

NOTE: See European Pressures, Gases and Categories Table on page 4a-4c.


D. ULTRASTAT 23 COOKING CONTROL


This cooking computer is capable of cooking up to ten (10) different products; each of which can be programmed to be cooked from one (1) to ten (10) different temperature at different times in a cook cycle. In addition, the operator can program the ULTRASTAT23 computer to cook products under “flex” or “STRAIGHT” timing modes. When programmed for “FLEX” time mode the computer will adjust the actual cook time taking into consideration the temperature variation due to load size, initial product temperature, product moisture content, and other factors that affect the cook cycle. Under “STRAIGHT” time mode, the product is cooked at a specified temperature for the length of time programmed without adjusting for these variations. Operation of the ULTRASTAT23 cooking computer is covered in the ULTRASTAT 23 Gas Fryer Computer Operating Instructions Manual PN 30A216 provided with the Fryer.

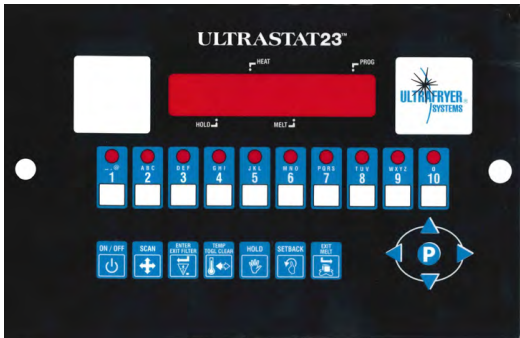

E. OPERATING CONTROLS LOCATION

18" MODEL PAR-3-H CE GAS FRYER

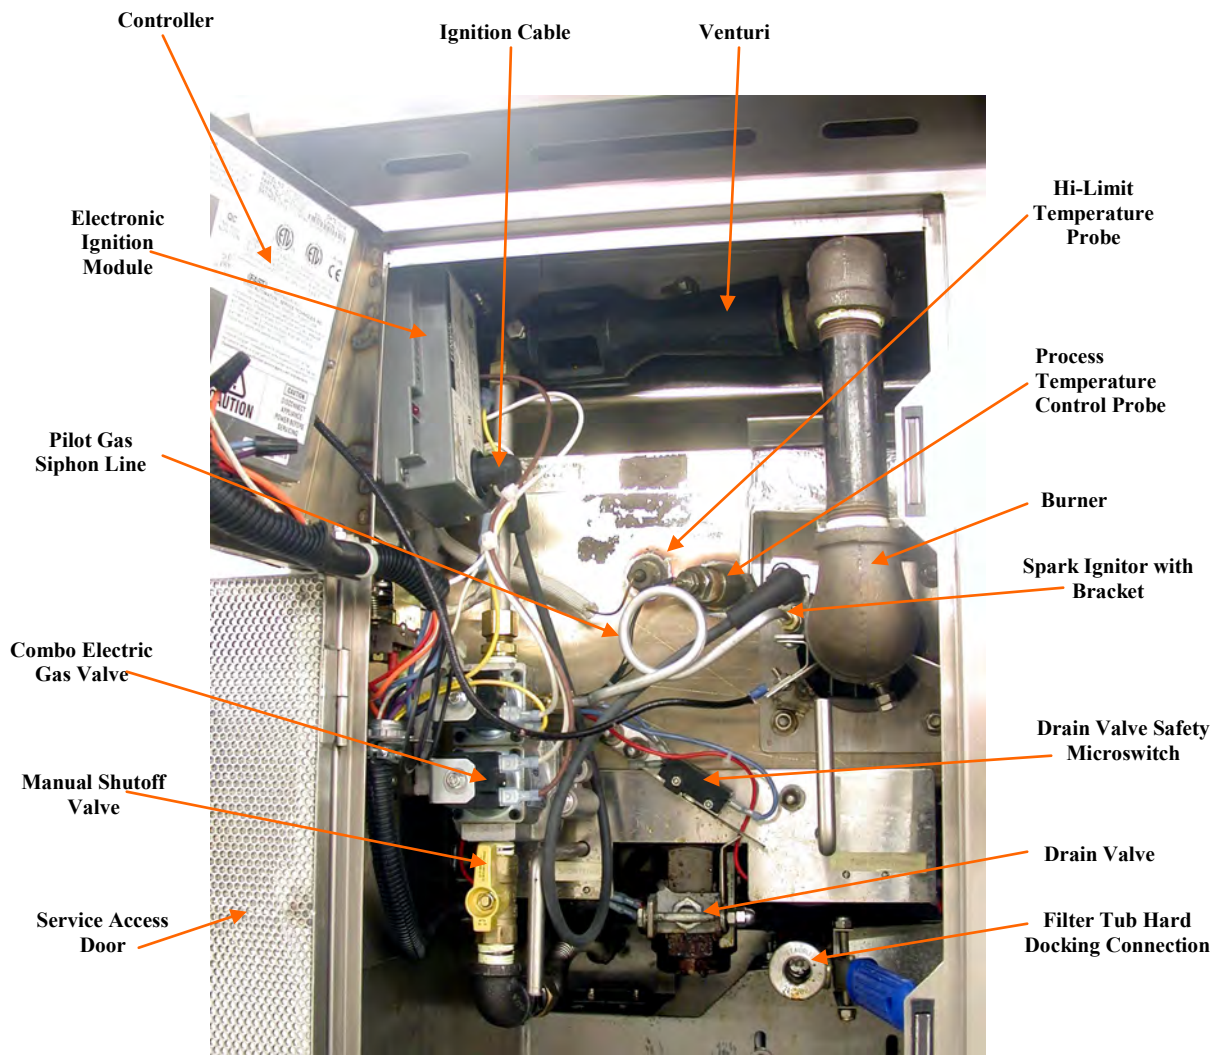

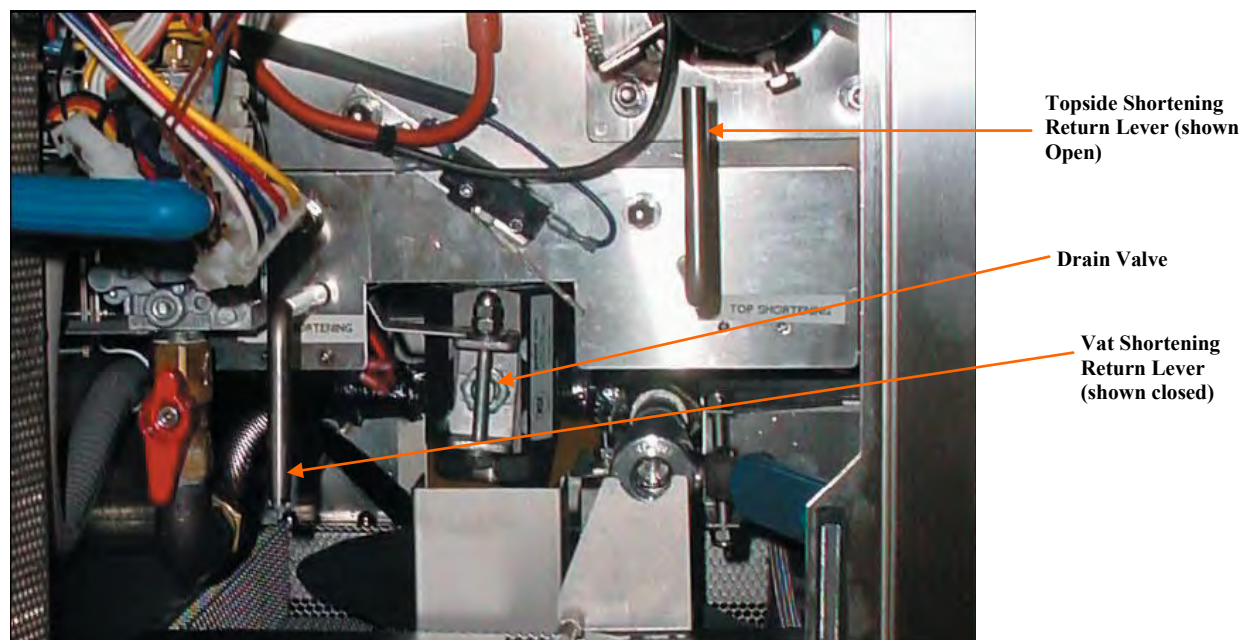

F. OPERATING CONTROLS:

The Model PAR-3-18 CE gas fryer is equipped an Ultrastat 23 Cooking Computer. Operating controls include the On/Off Switch, AMBER Power Indicator Lamp, RED Burner Indicator Lamp, and the applicable Temperature Controller. These controls are mounted on the Temperature Control access Panel; and other fryer controls are located behind the access door. The main drain valve and shortening return levers are located behind the Service Access door. These controls were identified in the illustrations shown on the previous page.

G. AUTOMATIC SAFETY FEATURES:

- 1. High limit thermostat to shut off gas to the main burners by opening a solenoid-actuated safety valve in the combination gas control valve.
- 2. Combination gas control valve which includes a built-in pressure regulator and manual valve.
- 3. Sensing circuit within the spark ignitor module to turn gas to the fryer OFF if a burner FLAME OUT occurs.
- 4. A Drain Valve Safety Switch that will DISABLE the fryer each time the drain valve is OPENED.
- 5. An AIR PRESSURE switch to open the electrical circuit to the spark ignitor and gas valve which will turn the gas to the fryer OFF in the event the blower fails.

H. EUROPEAN PRESSURE, GAS AND CATEGORIES TABLE

Ultrafryer Systems Inc European pressures, gases and categories Par3-18 Series Deep Fat Fryers

COUNTRY (code)	GAS Category	Applicable to model being tested	GAS Type	Supply Pressure (mbar)	Burner Pressure (mbar)	Nominal Input Rate (kW)			(Orifice) Injector size (mm)		Air shutter opening (mm)	
						Net 1	Net 2	Gross 1	Gross 2	main 1	pilot	main 2
Austria (AT)	I _{2H}	X	G20	20	10	29.5	NA	32	NA	4.90	NA	NA
	I _{3B/P}	X	G30	50	25	29.5	NA	32	NA	2.80	NA	NA
Belgium (BE)	I _{2E+}		G20/25	20/25								
	I ₃₊		G30/31	28-30/37								
	#3B		G30	28-30								
	I _{3P}	X	G31	37/50	25	29.5	NA	32	NA	3.0	NA	NA
Czech Republic (CZ)	I _{2H}	X	G20	20	10	29.5	NA	32	NA	4.90	NA	NA
	I _{3P}	X	G31	28-30/37	25	29.5	NA	32	NA	3.0	NA	NA
	I _{3B/P}	X	G30	30/50	25	29.5	NA	32	NA	2.80	NA	NA
	I _{3B/P}	X	G30	30	25	29.5	NA	32	NA	2.80	NA	NA
Cyprus (CY)	I _{2H}	X	G20	20	10	29.5	NA	32	NA	4.90	NA	NA
	I _{3B/P}	X	G30	28-30	25	29.5	NA	32	NA	2.80	NA	NA
	# 3P		G31	30								
Estonia (EE)	I _{2H}	X	G20	20	10	29.5	NA	32	NA	4.90	NA	NA
	I _{3B/P}	X	G30	30	25	29.5	NA	32	NA	2.80	NA	NA
Finland (FI)	I _{2H}	X	G20	20	10	29.5	NA	32	NA	4.90	NA	NA
	I _{3B/P}	X	G30	28-30	25	29.5	NA	32	NA	2.80	NA	NA
France (FR)	I _{2E+}		G20/25	20/25								
	I ₃₊		G30/31	28-30/37								
	I _{3B/P}	X	G30	28-30	25	29.5	NA	32	NA	2.80	NA	NA
	# 3B		*G30	50								
	I _{3P}	X	G31	37	25	29.5	NA	32	NA	3.0	NA	NA
	# 3P		*G31	50								
Germany (DE)	I _{2ELL}	X	G25	20	10	29.5	NA	32	NA	5.30	NA	NA
	I _{3B/P}	X	G30	50	25	29.5	NA	32	NA	2.80	NA	NA
	I _{3P}	X	G31	50	25	29.5	NA	32	NA	3.0	NA	NA
	# 2H		G20	20								
	# 2L		G25	20								
	I _{2E}	X	G20	20	10	29.5	NA	32	NA	4.90	NA	NA
Greece (GR)	2H	X	G20	20	10	29.5	NA	32	NA	4.90	NA	NA
	I _{3B/P}	X	G30	30	25	29.5	NA	32	NA	2.80	NA	NA
Hungary (HU)	I _{2H}	X	G20	20	10	29.5	NA	32	NA	4.90	NA	NA
	I _{2S}	X	G25.1	25	10	29.5	NA	32	NA	5.30	NA	NA
	I _{3P}	X	G31	29/50	25	29.5	NA	32	NA	3.0	NA	NA
	I _{3B/P}	X	G30	29/50	25	29.5	NA	32	NA	2.80	NA	NA

Ultrafryer Systems Inc

European pressures, gases and categories

Par3-18 Series Deep Fat Fryers

COUNTRY (code)	GAS Category	Applicable to model being tested	GAS Type	Supply Pressure (mbar)	Burner Pressure (mbar)	Nominal Input Rate (kW)				(Orifice)			Air shutter opening (mm)	
						Net 1	Net 2	Gross 1	Gross 2	main 1	main 2	pilot	main 1	main 2
Iceland (IS)	I3B/P	X	G30	30	25	29.5	NA	32	NA	2.80	NA	NA	NA	NA
Ireland (IE)	I2H	X	G20	20	10	29.5	NA	32	NA	4.90	NA	NA	NA	NA
	I3B	X	G30	28-30	25	29.5	NA	32	NA	2.80	NA	NA	NA	NA
	I3P	X	G31	37	25	29.5	NA	32	NA	3.0	NA	NA	NA	NA
	I3+		G30/31	28-30/37										
Italy (IT)	I2H	X	G20	20	10	29.5	NA	32	NA	4.90	NA	NA	NA	NA
	I2M		G20	20										
	I3+		G30/31	28-30/37										
Latvia (LV)	I2H	X	G20	20	10	29.5	NA	32	NA	4.90	NA	NA	NA	NA
	I2H	X	G20	20	10	29.5	NA	32	NA	4.90	NA	NA	NA	NA
Lithuania (LT)	I3P	X	G31	37	25	29.5	NA	32	NA	3.0	NA	NA	NA	NA
	I3B/P	X	G30	28-30	25	29.5	NA	32	NA	2.80	NA	NA	NA	NA
	2E	X	G20	20	10	29.5	NA	32	NA	4.90	NA	NA	NA	NA
Luxembourg(LU)	3B/P	X	G30	28-30/37	25	29.5	NA	32	NA	2.80	NA	NA	NA	NA
	I3B	X	G30	30	25	29.5	NA	32	NA	2.80	NA	NA	NA	NA
Malta (MT)	I2L	X	G25	25	10	29.5	NA	32	NA	5.30	NA	NA	NA	NA
Netherlands (NL)	I3B/P	X	G30	28-30	25	29.5	NA	32	NA	2.80	NA	NA	NA	NA
	I3P	X	G31	30/50	25	29.5	NA	32	NA	3.0	NA	NA	NA	NA
	I2H	X	G20	20	10	29.5	NA	32	NA	4.90	NA	NA	NA	NA
Norway (NO)	I3B/P	X	G30	30	25	29.5	NA	32	NA	2.80	NA	NA	NA	NA
	I2E	X	G20	20	10	29.5	NA	32	NA	4.90	NA	NA	NA	NA
Poland (PL)	I3B/P	X	G30	36	25	29.5	NA	32	NA	2.80	NA	NA	NA	NA
	I3P	X	G31	36	25	29.5	NA	32	NA	3.0	NA	NA	NA	NA
	I2H	X	G20	20	10	29.5	NA	32	NA	4.90	NA	NA	NA	NA
Portugal (PT)	I3+		G30/31	28-30/37										
	I3+		G30/31	50/67										
	I3B	X	G30	28-30	25	29.5	NA	32	NA	2.80	NA	NA	NA	NA
	I3P	X	G31	37	25	29.5	NA	32	NA	3.0	NA	NA	NA	NA
Slovenia (SL)	I2H	X	G20	20	10	29.5	NA	32	NA	4.90	NA	NA	NA	NA
	I3B/P	X	G30	30	25	29.5	NA	32	NA	2.80	NA	NA	NA	NA
	I2H	X	G20	20	10	29.5	NA	32	NA	4.90	NA	NA	NA	NA
Slovakia (SK)	I3B/P	X	G30	30/50	25	29.5	NA	32	NA	2.80	NA	NA	NA	NA
	I3P	X	G31	28-30/37	25	29.5	NA	32	NA	3.0	NA	NA	NA	NA

European pressures, gases and categories												Par3-18 Series Deep Fat Fryers			
COUNTRY (code)	GAS Category	Applicable to model being tested	GAS Type	Supply Pressure (mbar)	Burner Pressure (mbar)	Nominal Input Rate (kW)			(Orifice) Injector size (mm)		Air shutter opening (mm)				
						Net 1	Net 2	Gross 1	Gross 2	main 1	main 2	pilot	main 1	main 2	
Spain (ES)	I _{2H}	X	G20	20	10	29.5	NA	32	NA	4.90	NA	NA	NA		
	I ₃₊		G30/31	28-30/37											
	I _{3P}	X	G31	37	25	29.5	NA	32	NA	3.0	NA	NA	NA		
	I _{3P}	X	G31	50	25	29.5	NA	32	NA	3.0	NA	NA	NA		
Sweden (SE)	I _{2H}	X	G20	20	10	29.5	NA	32	NA	4.90	NA	NA	NA		
	I _{3B/P}	X	G30	28-30	25	29.5	NA	32	NA	2.80	NA	NA	NA		
	# 3P		G31	30											
Switzerland (CH)	I _{2H}	X	G20	20	10	29.5	NA	32	NA	4.90	NA	NA	NA		
	I ₃₊		G30/31	28-30/37											
	I _{3B/P}	X	*G30	50	25	29.5	NA	32	NA	2.80	NA	NA	NA		
	I _{3P}	X	*G31	50	25	29.5	NA	32	NA	3.0	NA	NA	NA		
Turkey (TR)	I _{2H}	X	G20	20	10	29.5	NA	32	NA	4.90	NA	NA	NA		
	I _{3B/P}	X	G30	28-30	25	29.5	NA	32	NA	2.80	NA	NA	NA		
	I _{3P}	X	G31	37	25	29.5	NA	32	NA	3.0	NA	NA	NA		
United Kingdom (GB)	I _{2H}	X	G20	20	10	29.5	NA	32	NA	4.90	NA	NA	NA		
	I _{3B/P}	X	G30	28-30	25	29.5	NA	32	NA	2.80	NA	NA	NA		
	I _{3P}	X	G31	37-50	25	29.5	NA	32	NA	3.0	NA	NA	NA		
	I ₃₊		G30/31	28-30/37											

* ONLY FOR CERTAIN TYPES OF NON-DOMESTIC APPLIANCES

(1) if convertible in field must supply additional instructions

THE COUNTRY HAS THE GAS BUT THEY DO NOT MARKET THE GAS AS A CATEGORY

EN Standards require the orifice size to be displayed on spud body and air shutters sealed in position.

G20 NATURAL GAS

G30 BUTANE GAS

G31 PROPANE GAS

+ indicates unregulated appliance or regulator is put out of action and sealed at the factory.

(FR)- I3B, I3P--50mbar supply for catering appliances

(IT)T - I2M-- LPG/Air mixture 42.29 MJ/m3

Natural gas / Low heating value natural gas

G30/31 BUTANE / PROPANE

G20/25

* ONLY FOR CERTAN TYPES OF NON-DOMESTIC APPLIANCES
(1) if convertible in field must supply additional instructions
THE COUNTRY HAS THE GAS BUT THEY DO NOT MARKET THE GAS AS A CATEGORY
EN Standards require the orifice size to be displayed on spud body and air shutters sealed in position.
G20 NATURAL GAS
G30 BUTANE GAS
G31 PROPANE GAS

+ indicates unregulated appliance or regulator is put out of action and sealed at the factory.

G30/31 BUTANE / PROPANE
G20/25 Natural gas / Low heating value natural gas

(FR)- I3B, I3P--50mbar supply for catering appliances
(IT)T) - I2M-- LPG/Air mixture 42.29 MJ/m3

Installation, Startup and Initial Cleaning

All installation and service on Ultrafryer equipment must be performed by Qualified, Certified, Licensed, and/or Authorized installation or service personnel. Qualified personnel must be experienced in such work, be familiar with all gas precautions involved, and have complied with all requirements of applicable National and local codes.

PRE-INSTALLATION

A. GENERAL

Safe and satisfactory operation of a gas fryer depends on its proper installation. Installation must conform to national and/or local codes. Each fryer should be installed as follows:

1. Placed beneath a properly designed exhaust hood
2. Installed by a licensed plumber.
3. Connected to the type gas for which the unit was fabricated as shown on the rating plate.
4. Connected to the proper size pressure regulator installed in the gas supply line and adjusted to the proper manifold pressure.
5. Connected to the main gas supply line with the proper size supply line.
6. Restrained by use of a restraining chain device to avoid splashing of hot liquid and to assure tension cannot be placed on the flexible gas line or fittings (see picture on page 7).

B. RATING PLATE

The rating plate on the 18" PAR-3-HE CE Gas Fryer is located on the inside of the service access door and contains the following: Model and serial number, BTU/HR (MJ/HR) input rating of the burner; supply pressure in mbar; Burner pressure; orifice size and type gas as acquired from the European Pressures, Gases and Categories table on page 4a-4c.



The fryer must be connected only to the type of gas identified on this rating plate.

Safe and satisfactory operation of a Par3-18H CE gas fryer depends upon proper installation. Installation must conform to local codes.

C. CLEARANCES

The appliance must be kept free and clear of all combustibles. The minimum clearance from combustible and non-combustible construction is 6" (152 mm) from the sides, and 6" (152 mm) from rear. The fryer may be installed on combustible floors.



NOTE: Adequate clearances must be provided for servicing and proper operation.

D. STANDARDS

Installation must be planned in accordance with all applicable National and local codes, taking into account the following requirements.

1. The fryer and its individual shut-off valve must be disconnected from the gas supply piping system during any pressure testing of that system at pressures in excess of 1/2 psig (3.45kPa).
2. The fryer must be isolated from the gas supply piping system by closing its individual manual shut-off valve during any pressure testing of the gas supply piping system at pressures equal to or less than 1/2 psig (3.45kPa).
3. When installed the fryer must be electrically grounded in accordance with local codes.



NOTE: Local building codes will usually not permit a fryer with its open tank of hot oil to be installed immediately next to an open flame of any type, whether a broiler or an open burner or range. Check local codes before beginning installation.

E. AIR SUPPLY AND VENTILATION

The area around the appliance must be kept clear of any combustible or flammable products and avoid any obstruction to the flow of ventilation air as well as for ease of maintenance and service. NOTHING is to be stored in the interior of the fryer's cabinet except the filter tub assembly.

1. A means must be provided for any commercial, heavy duty-cooking appliance to exhaust combustion wastes outside of the building. It is essential that a fryer be set under a powered exhaust vent hood or that an exhaust fan be provided in the wall above the unit, as exhaust temperatures are in the vicinity of 400°F (204°C).



NOTE: Strong exhaust fans in a hood or in the overall air conditioning system can produce slight air drafts in the room, which can interfere with burner performance and be hard to diagnose. Air movement should be checked during installation and if burner problems persist, make-up air openings or baffles may have to be provided in the room.

2. Exhaust temperature, in addition to the open tank of hot oil, make the storage of anything on shelving over or behind the fryer unsafe.
3. Filters and drip troughs should be part of any industrial hood, but consult local codes before constructing and installing any hood.
4. Provisions must be made for an adequate supply of fresh air and adequate clearance must be maintained for air openings into the combustion chamber.

RECEIVING AND INSTALLING

A. UNPACKING

Check that the container is upright and that the plastic wrap is securely strapped to the wooden skid. Check for visible damage; and if damage has occurred, do not refuse shipment, but contact the carrier and file the appropriate freight claims. CAREFULLY remove the plastic wrap and straps; then remove the fryer from the skid.

B. INSTALLING

Roll the assembled fryer into the building, to its operating location.



WARNING: IMPROPER INSTALLATION, ADJUSTMENT, ALTERATION, SERVICE OR MAINTENANCE CAN CAUSE PROPERTY DAMAGE, INJURY OR DEATH. READ THE INSTALLATION, OPERATING AND MAINTENANCE INSTRUCTIONS THOROUGHLY BEFORE INSTALLING OR SERVICING THIS EQUIPMENT. PARTS AND ADJUSTMENTS PROTECTED AND SEALED BY MANUFACTURER OR THEIR AGENTS ARE NOT TO BE ADJUSTED BY THE USER.

C. LEVELING

1. When the fryer is placed in its operating location check to be sure it is level. If not, loosen the casters and insert the appropriate number of shim plates between leg and caster plates then retighten the caster bolts.
2. If the floor is smooth and level, adjust to the high corner and measure with a spirit level. If the floor is uneven or has a decided slope, level the unit with metal shims.



NOTE: A caster may not return exactly to the same position after being moved, which may require re-leveling after each move.


3. Connect the gas manifold to the building gas supply line by means of an approved flexible gas line as shown in the figure below.



NOTE: 3/4" (19mm), 1" (25mm) and 1 1/4" (32mm) flexible gas hoses 4 feet long (1219mm) with a quick disconnect coupling on one end are available from Ultrafryer Systems under PN 24322 (3/4" (19mm) hose), PN 24323 (1" (25mm) hose) and PN 24456 (1 1/4" (32mm) hose). These hoses are equipped with a fusible link, which melts at 361°F (183°C) that will SHUT OFF the gas supply when it melts. A 44" (1119mm) long restraining device is also available under PN 24324.



CAUTION: THE BUILDING GAS SUPPLY LINE MUST BE SIZED TO PROVIDE THE VOLUME OF GAS REQUIRED FOR PROPER OPERATION AS EXPLAINED IN THE EUROPEAN PRESSURE, GAS AND CATEGORIES TABLE ON PAGE 4a-4c.

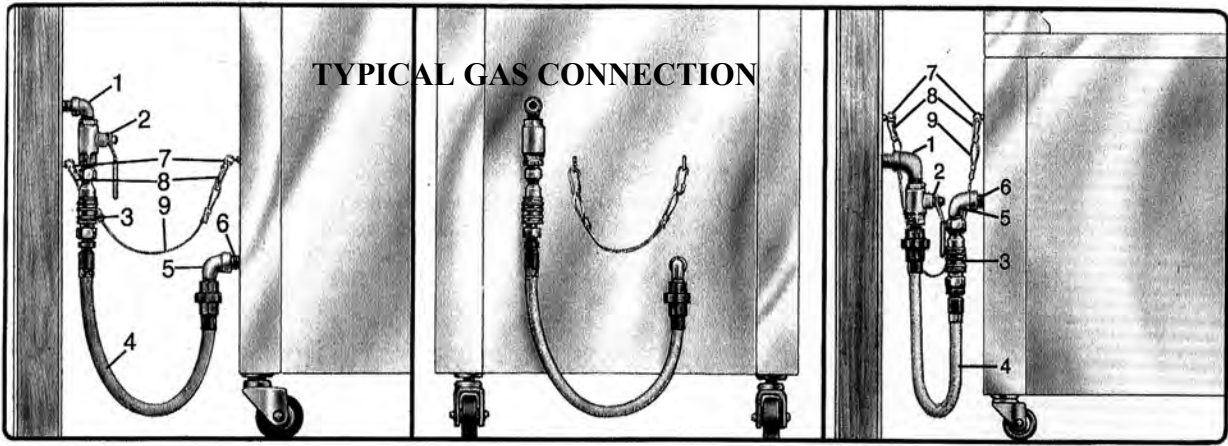

WARNING: THE RESTRAINT DEVICE (ITEM 9) MUST BE INSTALLED TO ASSURE TENSION CANNOT BE PLACED ON THE FLEXIBLE GAS LINE OR FITTING.

- | | |
|--------------------------------|------------------------------|
| 1. BUILDING GAS SERVICE LINE | 6. APPLIANCE MANIFOLD/NIPPLE |
| 2. MAIN GAS CUT-OFF VALVE | 7. EYELET FASTENERS |
| 3. CONNECT-IT QUICK-DISCONNECT | 8. SPRING HOOK |
| 4. FLEX-CON CONNECTOR | 9. RESTRAINING CHAIN |
| 5. ELBOW | |

D. GAS CONNECTION

The gas supply (service) line must be the same size or greater than the inlet line of the appliance. **THE GAS SUPPLY LINES MUST BE SIZED TO ACCOMMODATE ALL THE GAS FIRED EQUIPMENT THAT MAY BE CONNECTED TO THAT SUPPLY.** Refer to the table on page 4a-4c for inlet gas requirements.



NOTE: Sealant used on all pipe joints must be resistive to butane and propane gas.

1. Manual shut off valve

This supplier-installed valve must be installed in the gas service line ahead of the appliance and in a position where it can be reached quickly in the event of an emergency.

2. Pressure regulator

All commercial cooking equipment must have a pressure regulator on the incoming service line for safe and efficient operation, because service pressure may fluctuate with local demand. External regulators are not required on this fryer, as that function is performed by a combination gas control valve, however if the incoming pressure is in excess of 1/2 psig, (.035kg/cm²) a step-down regulator will be required.

3. Gas Pressures

Set gas pressures according to Category Tables on page 4a-4c. The “inlet” pressure **MUST** be checked with a manometer or gas pressures gage **PRIOR** to placing the fryer in operation.



WARNING: IF THE “INLET” GAS PRESSURE AT THE FRYER’S COMBINATION GAS CONTROL VALVE “EXCEEDS” 1/2 lb/in2 (.035 kg/cm2) OR APPROXIMATELY 14” (356 mm) W.C., AN EXTERNAL REGULATOR MAY BE NEEDED TO PREVENT DAMAGE TO THE COMBINATION GAS VALVE, AND VOIDING OF WARRANTY. FAILURE TO ADDRESS THIS COULD RESULT IN AN EXPLOSION OR A FIRE

4. Combination gas control valve

The correct combination gas control valve and orifice is installed at the factory for BUTANE, NATURAL and PROPANE units based on each Purchase Order. This valve should be CHECKED/ADJUSTED by qualified service personnel using proper test equipment for the “OUTLET” gas pressure obtained from the table on page 4a-4c.

5. Rigid connections

Check any installer-supplied intake pipe(s) visually and/or blow them out with compressed air to clear dirt particles, threading chips or any other foreign matter before connecting to the service line as these particles may clog the orifice when gas pressure is applied. All connections must be tested with a leak detector or soapy solution before lighting the fryer. Putting an open flame beside a new connection is not only dangerous, but will often miss small leaks that a soapy solution would find.



WARNING: DO NOT USE AN OPEN FLAME TO CHECK FOR LEAKS! AN OPEN FLAME MAY CAUSE AN EXPLOSION OR PERSONAL INJURY.

6. Flexible Couplings, Connectors

The gas inlet to the appliance shall have a thread conforming to EN 10226-2:2004, EN 10226-2:2005 or ISO 228-1 depending on the country. For LPG appliances the gas inlet to the appliance shall be without a thread, with an external thread (according to EN 10226-1:2004 or 10226-2:2005) depending on the country. Adequate means must be provided to limit the movement of the appliance without depending on the connector and the quick disconnect device or its associated piping to limit the appliance movement and the location(s) where the restraining means may be attached to the appliance shall be specified.



WARNING: DOMESTIC CONNECTORS ARE NOT SUITABLE!!! MAY CAUSE DAMAGE TO EQUIPMENT OR PERSONAL INJURY

7. Fryer Service

The fryer is equipped with swivel casters. To service the fryer:

- Turn “OFF” gas supply at the supply source.
- Disconnect the flexible gas line quick-disconnect
- Disconnect restraint means and roll fryer out for rear service access.
- When the fryer is re-positioned, be sure to reconnect the restraint and level the fryer.

E. ELECTRICAL CONNECTION

The MAXIMUM current draw per vat at Initial Start-up or during a Warm-up Cycle will be 3 Amperes at 230 Volts. When running the Filter System simultaneously allow for an additional 3 Amperes. Refer to the wiring diagram attached to the inside of the Service Access door for internal electrical connections. All external electrical connections **MUST** be in compliance with National and local codes. Electrical receptacles and plugs installed by local electricians **MUST** meet the requirements of National and local codes and **MUST** be accessible to operators of the fryer.



WARNING: TO AVOID INJURY

- I DO NOT MOVE A FRYER FILLED WITH HOT LIQUID.**
- II THE FRYER MUST BE RESTRAINED BY USE OF A RETAINING DEVICE TO PREVENT TIPPING TO AVOID THE SPLASHING OF HOT LIQUID.**
- III THE AREA SURROUNDING THE FRYER MUST BE KEPT FREE AND CLEAR OF ALL COMBUSTIBLES.**
- IV DO NOT GO NEAR THE AREA DIRECTLY OVER THE FLUE OUTLET WHEN THE FRYER'S MAIN BURNERS ARE OPERATING.**
- V ALWAYS WEAR OIL-PROOF, INSULATED GLOVES WHEN WORKING WITH A FRYER FILLED WITH HOT OIL.**
- VI ALWAYS DRAIN HOT OIL INTO A METAL TUB, POT OR CAN . HOT OIL CAN MELT PLASTIC BUCKETS OR SHATTER GLASS CONTAINERS.**

INITIAL START-UP

A. CLEANING

New units are wiped clean at the factory to remove any visible signs of dirt, oil, grease, etcetera, remaining from the manufacturing process. Each fryer vessel should be thoroughly washed with hot soapy water to remove film residues, installation dust or debris; rinsed and then wiped dry before being used for food preparation.

B. START-UP

Each Model Par3-18H CE fryer is tested, adjusted and calibrated prior to being shipped; however adjustments may be necessary on installation to meet local conditions, high or low gas pressure, differences in altitudes, variations in gas characteristics and to correct possible problems caused by rough handling or vibration during shipment. Initial calibration or adjustment is the responsibility of the customer and will not be covered by the Ultrafryer Systems warranty.



NOTE: Calibration and adjustments must be performed by qualified personnel.

C. LIGHTING INSTRUCTIONS

Each fryer is equipped with a spark ignition system and to test this system, perform the following steps, in sequence:

1. Turn the ON/OFF SWITCH to the OFF position.
2. Fill the fryer vessel with hot or cold water to the SHORTENING LEVEL mark on the rear wall of the fryer vat.



CAUTION: IF THE MAIN BURNERS ARE OPERATED WITH THE VESSEL EMPTY, THE HEAT WILL CAUSE THE JOINTS OF THE FRYER VESSEL TO BE PLACED UNDER UNDUE STRESS AND MAY CAUSE THE HEAT EXCHANGER VESSEL TO WARP OR BUCKLE, VOIDING WARRANTY.

3. Turn the manual gas valve located behind the fryer Service Access door to the OFF position and wait FIVE (5) minutes for any accumulated gas to disperse.
4. ENSURE the MAIN gas shut-off is in the ON position, MANUAL VALVE on the combination GAS CONTROL VALVE (located behind the fryer Service Access door) is in the ON position and the Vent Hood EXHAUST FAN is ON.
5. Turn the manual gas valve to the ON position.
6. Turn the ON/OFF switch ON; The ignition spark will light the flame. Ensure the pilot is lit then place the ULTRASTAT 23 Cooking Computer into the MELT MODE.



WARNING!!! DO NOT USE A MATCH OR CANDLE TO LIGHT A FRYER... EVER!

D. SEQUENCE OF IGNITION

When the lighting instruction steps are performed in the sequence listed above, the following will occur:

1. On/off switch when on will turn ignition module on, open the pilot valve and light the pilot.
2. Press on/off button on the computer
3. Blower will come ON activating the air pressure switch.
4. The air pressure switch will CLOSE completing the electrical circuit to the transformer.
5. The transformer will supply 24 volts to the GAS CONTROL VALVE, which will open the main valve lighting the gas in the burner.



WARNING!!! WHEN CHECKING FOR BURNER PERFORMANCE, DO NOT STAND WITH YOUR FACE CLOSE TO THE BURNER.... IT MAY LIGHT WITH A "POP" AND COULD FLASH BACK AND CAUSE FACIAL BURNS.



NOTES: 1) If the burner flame fails, it will be sensed by the SPARK IGNITOR, the Spark Ignitor Module will open the electrical circuit to the GAS CONTROL VALVE shutting off gas to the pilot.
2) If the blower fails, the air pressure switch will open the electrical circuit to the TRANSFORMER removing electrical power from the GAS CONTROL VALVE shutting off gas to the burner.

E. BURNER OPERATION TEST


Perform above LIGHTING INSTRUCTIONS and observe operation of the burners. Look for the following characteristics. WHEN SATISFIED THAT THE BURNER IS OPERATING PROPERLY, TEST START-UP THE FRYER AS FOLLOWS:

1. No ignition cross lighting.
2. Good flame stability - no lifting or flash back.
3. No carboning.
4. No influence from draft.

F. TEST START-UP

To test operate an Ultrafryer gas fryer equipped with an Ultrastat 23 Cooking computer:

- 1. Ensure the fryer’s On/Off switch is in the OFF position.
- 2. Ensure the fryer vat is filled with hot or cold water to the middle of the “E” in the word LEVEL on the rear of the vat.
- 3. Turn the MANUAL gas valve to the OFF position and wait FIVE (5) minutes for any accumulated gas to disperse.
- 4. ENSURE the MAIN gas shut-off valve is in the ON position and that the Vent Hood EXHAUST FAN is ON.
- 5. Turn the MANUAL gas valve to the ON position.
- 6. Perform the following steps, in the order listed:

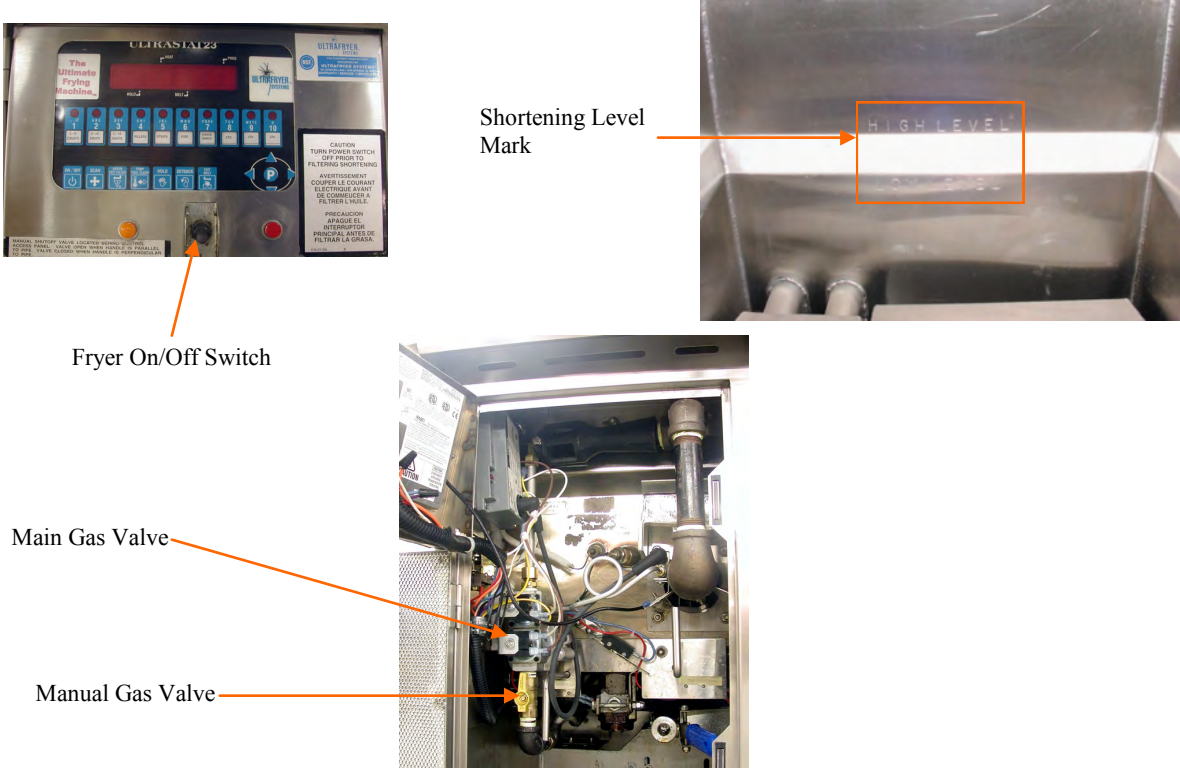

CAUTION: PRIOR TO PROCEEDING TO STEP 1, VISUALLY CHECK THAT THE HEAT EXCHANGER TUBES ARE COVERED BY AT LEAST 2” (51MM) OF WATER.

STEP	ACTION	RESPONSE
1	Ensure the drain valve lever is in the closed position and that water is at the proper level; then turn the On/Off switch to the ON position.	The AMBER power lamp beside the fryer On/Off switch will illuminate. Spark will light pilot flame.
2	Turn the computer ON by depressing the computer On/Off button; then place the computer in the BOIL mode by pressing the P key scroll to boil press P key again to activate.	A. BOIL will appear in the computer display. B. The HEAT lamp on the computer and the RED burner indicator lamp on the fryer will cycle ON and OFF to heat the water to 190°F (88°C)
3	When the water reaches temp 190° F (87.8° C), the heat light will go off. To Exit, Press the on/off button.	A. Boil appears in the display heat indicator light goes off. B. OFF appears in the display.
4	Turn the computer OFF by depressing it’s On/Off button then turn the on/off toggle switch to the OFF position.	A. The computer display will go BLANK. B. The AMBER power lamp will extinguish.
5	After the water in the vat and the fryer metal surfaces have COOLED drain the water into a floor drain.	

ABBREVIATED OPERATING INSTRUCTIONS

A. GENERAL

This gas fryer is equipped with a shortening filter system which is to be operated and cleaned according to the FRYER OPERATION and CLEANING sections of this manual.

1. SHORTENING

Use a high quality shortening to achieve a consistent quality product as well as a long term savings.

2. SHORTENING TEMPERATURE

Most products should be cooked with a shortening temperature about 350°F (177°C); however, each product should be cooked at the LOWEST temperature that produces a high quality product while obtaining maximum usage of the shortening.

3. SALTING

Products should not be salted over the fryer vessel as salt quickly deteriorates the shortening and flavors other products cooked in the same shortening.

4. POWER FAILURES

The fryer cannot be operated during power failures. DO NOT attempt to manually operate the fryer.



CAUTION: THE GAS FRYER CANNOT BE OPERATED DURING POWER FAILURES. DO NOT ATTEMPT TO

5. PUMP MOTOR

The filter pump motor is protected by a motor thermal overload switch.



WARNING: ENSURE THE WASH DOWN HOSE IS NOT CONNECTED TO FRYER PRIOR TO RESETTNG A THERMAL OVERLOAD SWITCH.

B. FILTERING SHORTENING

Fryer's equipped with a stainless steel filter screen should be filtered at least twice a day. Place the recommended amount of filter agent in the shortening as prescribed by the chemical supplier and follow instructions for filtering shortening provided in the operating section of this manual.

C. LEVELING SHORTENING (TOPPING OFF)

After filtering, the shortening level must be checked and fresh shortening added when necessary.

1. The shortening in the vat should reach to the middle line of the "E" in the word LEVEL of the shortening level mark on the rear wall of the fryer.
2. If shortening is needed, Add a small amount to bring shortening to the proper level.
3. Repeat the above steps until the shortening in the vat is at the proper level.

D. BOILING OUT FRYER

The fryer should be BOILED OUT every 7 DAYS to remove carbon buildup and other encrusted materials. Add the amount of boil out compound to the fryer as prescribed in the cleaning manual provided by the chemical supplier and follow instructions for boiling out a fryer in the operating section of this manual.

E. CLOSING / SHUTDOWN INSTRUCTIONS

1. CLOSING

When closing at night; filter the shortening in the fryer, THOROUGHLY drain all filter lines and cover the fryer vessel.

Turn the ON/OFF Switch on the fryer OFF and turn the Manual Gas Valve OFF.

2. SHUTDOWN OR PROLONGED POWER FAILURE:

a. Shutdown

Perform the following whenever a fryer is being shutdown for an extended period of time:

1. Drain and discard the shortening.
2. THOROUGHLY clean the fryer vat.
3. Turn the ON/OFF Switch to the OFF position, disconnect the 230-volt power cord and turn applicable Circuit Breakers OFF.
4. Turn the Manual Gas Valve OFF.

b. Prolonged power failure

The gas fryer cannot be operated during power failures. DO NOT attempt to bypass safety controls and manually start the fryer.

PREVENTIVE MAINTENANCE & TROUBLESHOOTING

A. PREVENTIVE MAINTENANCE

Minimal maintenance is required on a gas fryer because of its design and the materials used in the manufacturing process. However, some preventive maintenance and inspection must be performed periodically to prevent break downs which could curtail food sales. Any preventive maintenance or inspection should be accomplished with CAUTION while the fryer is in operation since HOT liquid shortening could cause severe burns. If service or repair is required, all gas and electric power **MUST BE TURNED OFF PRIOR TO** performing that service or repair.

PREVENTIVE MAINTENANCE SCHEDULE

<u>INSPECTION ITEM</u>	<u>INSPECTION PRIORITY</u>	<u>INSPECTION DESCRIPTION</u>
Venthood Grease Filters	DAILY	Clean grease filters in the exhaust vent hood each evening and allow them to dry overnight.
Filter Tub	DAILY	Thoroughly clean the filter tub assembly prior to leaving the store at closing
Drain Valve & Shortening Return Levers	WEEKLY	Determine that all levers are securely attached and that they can be easily opened and closed.
Temperature Sensing Probes	WEEKLY	During Boil-Out of the fryer inspect the temperature and high limit sensing probes for any visual damage



WARNING: CRUMBS AND SLUDGE LEFT IN THE FILTER TUB OVERNIGHT ARE A FIRE HAZARD. THEY MUST BE DISCARDED AT THE END OF EACH DAY.

B. TROUBLESHOOTING

I. GENERAL

- The problems and possible solutions listed in the troubleshooting chart below are typical problems that are frequently encountered. ONLY qualified repairmen are to use the troubleshooting chart to repair this fryer. In the event a main burner malfunction occurs, perform the following checks PRIOR to contacting a repairman:
- a. Ensure Gas Valves are in their proper position.
 - b. Check that the fryer electrical plug is connected to an electrical receptacle.
 - c. Ensure the applicable Circuit Breaker is in the ON position and that the fryer ON/OFF switch is in the ON position.
 - d. Ensure the applicable fryer control has been placed in the FULL ON mode.
 - e. Ensure the gas supply line quick-disconnect coupling is SEATED on the gas manifold fitting.
 - f. Determine that the blower is operating.


2. TROUBLESHOOTING CHART

Should a problem occur that cannot be corrected after performing the above CHECKS, contact an AUTHORIZED repairman and/or Ultrafryer Systems Customer Service (1-800-525-8130) and provide the information acquired while performing these checks.



WARNING: ENSURE REPAIRMEN ARE ADVISED THAT FRYER RESTRAINTS MUST BE DISCONNECTED/ CONNECTED IF A FRYER IS TO BE MOVED DURING MAINTENANCE OR REPAIR, AND THAT ELECTRICAL POWER AND GAS MUST BE TURNED OFF PRIOR TO PERFORMING ANY MAINTENANCE OR REPAIR.

TROUBLESHOOTING CHART

ITEM	PROBLEMS	POSSIBLE SOLUTIONS
1	Main burner will not ignite. Blower is operating; but gas is not present at the burner.	A. Check the Blower air pressure Switch by temporarily disconnecting the two (2) ORANGE air switch wires and connecting them together. If the IGNITOR sparks when these wires are connected, the air pressure switch is defective and it will have to be replaced. B. Check the following components and replace if found to be defective: Gas Control Valve Hi-Limit Switch Transformer
2	Electrical power is present at the fryer but the Blower is not operating.	A. Blower may have over-heated and shut off on thermal overload. If this situation did occur, it will correct itself when the motor cools (10-20 minutes). If this overheating problem persists, replace the blower.
3	Excessive time is required to raise the shortening to cooking temperature. Temperature recovery is slow and main burner flames are small and appear to be lethargic.	A. Ensure that the MANUAL GAS VALVE is completely open. B. Check for an obstruction in the gas line. C. Check for an obstruction in the flue pipe. D. Check that the ORFICE PLUG has the correct drill size opening as indicated on the table on page 6. E. Check for BLOWER damage. F. Use a standard water-type U-gauge Manometoer to check the pressure at the gas control valve pressure tap. Proper gas pressure is indicated on the table on page 4a-4c.  NOTE: If necessary remove the Pressure Regulator Adjustment Cover and adjust this control to the burner and COUNTER CLOCKWISE to decrease gas pressure. Replace adjustment cover.)
4	Shortening temperature is too high and breaks down quickly.	A. Check the gas pressure as described above.
5	The filter pump motor fails to operate when the Vat Shortening Return / Topside Shortening Lever is placed in the OPEN position.	A. Insure the filter pump micro-switch is good then check the manual reset button on the filter pump motor. B. If the filter pump motor fails to operate after the reset button has been depressed, repair or replace the motor.
6	Decreased shortening flow rate while filtering.	A. Check for excessive sediment on the filter screen standpipe suction fitting or in filter tub.
7	Pump/Motor operates but does not pump shortenings.	A. Check for congealed shortening in the shortening system. B. Check 11 mm Bulkhead connection (STAUBLI).
8	Pump / Motor hums but will not pump shortening	A. Check for congealed shortening in the pump or in shortening plumbing.

CLEANING

GENERAL

Any item of equipment operates better and lasts longer when it is kept clean and properly maintained and this Gas Fryer is no exception. In order for the fryer to provide years of trouble-free service, it must be CLEANED and MAINTAINED according to instructions herein and at the intervals listed below:



CAUTION: TO ASSURE PRODUCING A QUALITY PRODUCT WHILE PROLONGING THE LIFE EXPECTANCY OF THE FRYER, ENSURE FILTERING, BOIL-OUT AND CLEANING INSTRUCTIONS ARE STRICTLY ADHERED TO.

I. DAILY


A. Clean the fryer surface periodically during operating hours with a solution of sanitizer and hot water, and at closing with stainless steel cleaner. If necessary, use a dampened 3M type 7447 RED or 7440 BROWN (heavy duty) Scotch Brite pad to remove encrusted material.



CAUTION: DO NOT use steel wool, abrasive cloths, cleaners, powders or metal devices to scrape stainless steel! Scratches on stainless steel are almost impossible to remove!




WARNING: DO NOT ALLOW ANY CLEANING SOLUTION OR WATER TO SPLASH INTO A VESSEL OF HOT COOKING OIL, AS IT WILL CONTAMINATE THE OIL AND MAY CAUSE THE OIL TO SPLATTER CAUSING SEVERE BURNS.

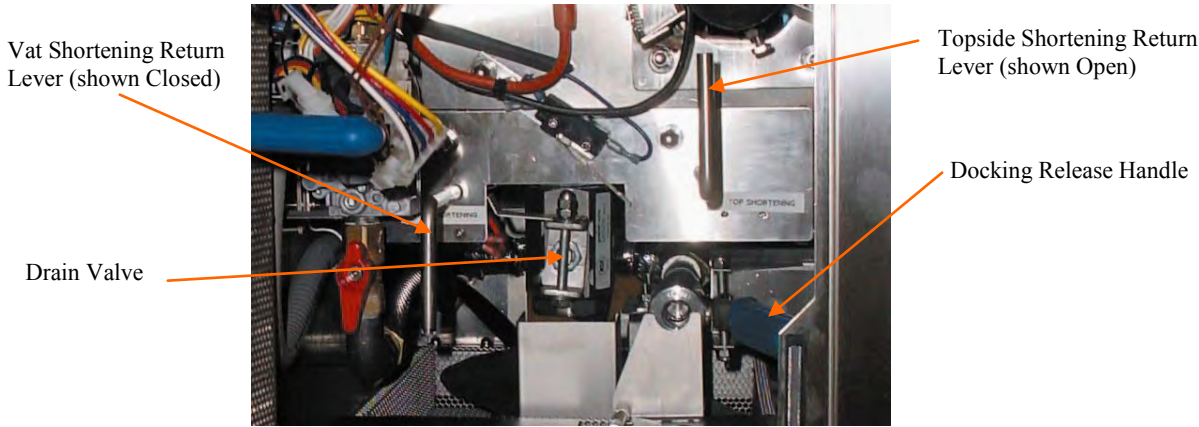


Crumb Catcher Screen Standpipe Docking Handle Assy

B. The Filter Tub Assembly and Filter Screen should be cleaned EACH DAY after FILTERING and AT CLOSING and THOROUGHLY cleaned once each week to remove the Filter Tub Assembly from the fryer:

- OPEN the Fryer's Service Access Door.
- DEPRESS the DOCKING RELEASE HANDLE, shown above.
- PULL the Filter Tub Assembly from the fryer using the Standpipe Docking Handle Assy.

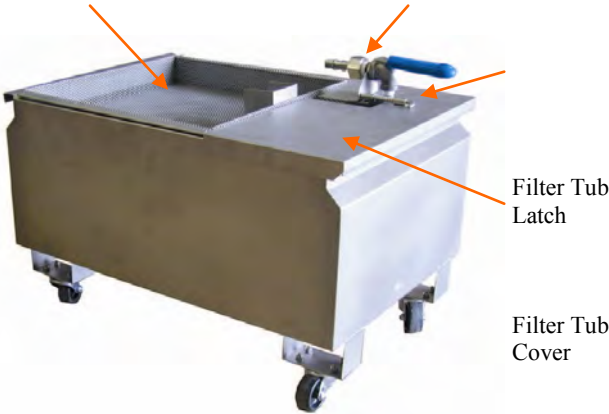

WARNING: CRUMBS AND SLUDGE LEFT IN THE FILTER TUB OVERNIGHT ARE A FIRE HAZARD

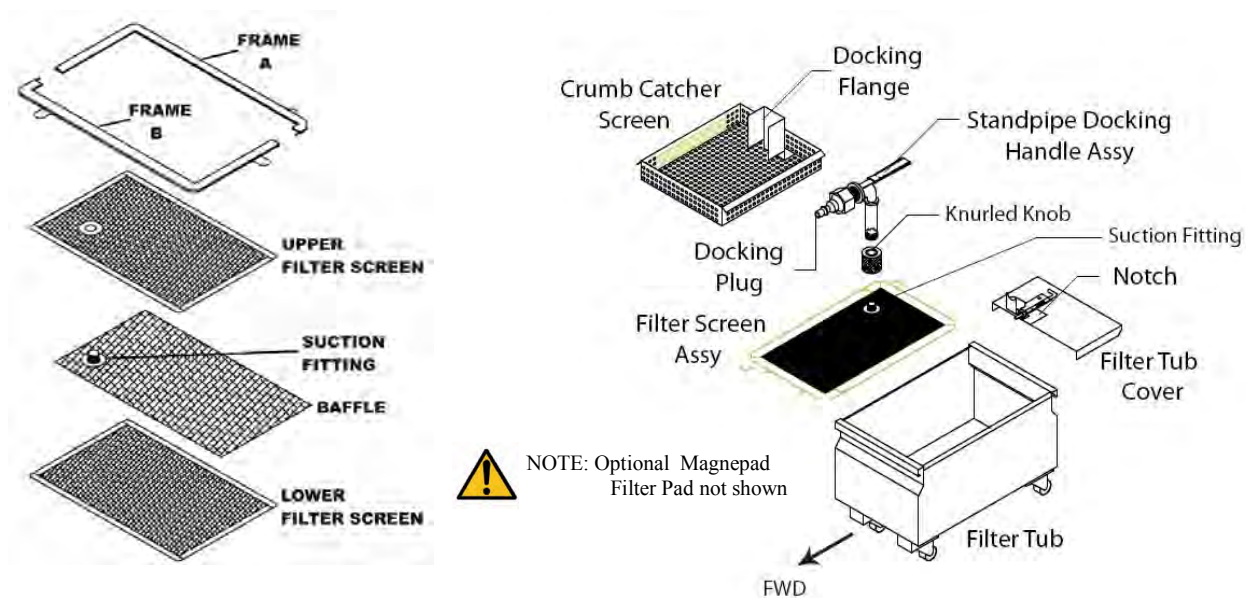

C. CLEANING THE FILTER TUB AFTER FILTERING & AT CLOSING AS FOLLOWS:

1. Disassemble the Filter tub by removing the following items in the order listed; 1) FILTER TUB COVER, 2) CRUMB CATCHER SCREEN, 3) FILTER SCREEN W/STANDPIPE/DOCKING attached; then 4) separate the STANDPIPE and DOCKING ASSEMBLY from the Filter Screen.
2. Clean the Wash Down Hose with sanitizer solution; then hang the Wash Down Hose in an upright position so shortening can drain into a container.
3. Discard crumb fragments in the Crumb Catcher Pan and THOROUGHLY clean the pan with HOT water and let it air dry.
4. Raise the Filter Assembly with Standpipe and Docking Assembly attached, above the Filter Tub and let any sediment or shortening drain into the tub; then separate the standpipe/docking assembly from the Filter Screen and clean the assembly with sanitizer solution and wipe it dry with a lint free cloth. Remove any sediment and shortening in the Filter tub using a scraper; then wipe the tub dry with paper towels.

D1. THOROUGHLY CLEAN THE FILTER ASSEMBLY FOLLOWS:

1. "Micro-Mesh" Stainless Steel Filter Screen
 - a. CAREFULLY remove any debris from the screen using a scraper.
 - b. Grasp the FINGER LOOP on FRAME A and adjacent FINGER LOOP on FRAME B, EVENLY pull the frames apart; then HINGE FRAME A to remove it from the FILTER SCREENS FIRST.
 - c. Grasp the FINGER LOOP on the straight side of FRAME B; then HINGE it to remove FRAME B from the FILTER SCREENS.
 - d. Separate the UPPER FILTER SCREEN and BAFFLE from the LOWER FILTER SCREEN.
 - e. CAREFULLY clean the two frames, screens and baffle in the 3 compartment sink with hot water and allow these items to air dry. DO NOT USE SOAP. If necessary the channels in each frame can be cleaned with the edge of a scotch-brite pad.
 - f. Insert the SUCTION FITTING on the BAFFLE in the hole of the UPPER FILTER SCREEN; then place these items on top of the LOWER FILTER SCREEN.
 - g. ENSURE all sides of the FILTER SCREEN assembly are aligned, place the PIN end of FRAME A on the FILTER SCREENS, place the CHANNEL on the frame adjacent to the PIN end over the FILTER SCREENS; then HINGE the frame so the edge of the FILTER SCREENS are inserted in the other CHANNEL of FRAME A.
 - h. Place the PIN end of FRAME B on the FILTER SCREENS so the PIN is seated in the CHANNEL of FRAME A near the FINGER LOOP, place the CHANNEL on the frame adjacent to the PIN end over the edge of the FILTER SCREENS; then HINGE the frame so the edge of the FILTER SCREENS are inserted in the other CHANNEL of FRAME B and the PIN of FRAME A is seated in the CHANNEL of FRAME B.
 - i. Adjust FRAME A and B so both PINS are properly seated in the CHANNEL of the opposite frame; then CAREFULLY connect the KNURL KNOB on the STANDPIPE/DOCKING ASSEMBLY to the SUCTION FITTING on the FILTER SCREEN assembly. DO NOT OVERTIGHTEN!!!

D2. OPTIONAL MAGNA PAD

1. If applicable, clean the Magnepad envelope filter pad at CLOSING as follows: Remove and discard the used filter pad envelope, carefully clean the baffle assembly and clip/standpipe assembly in a 3 compartment sink with hot water and allow these items to air dry. DO NOT USE SOAP!! Reassemble the Magnepad envelope filter using a NEW Magnesol Impregnated Filter Pad or paper envelope as follows:
 - a. Insert the BAFFLE into the FILTER PAD ENVELOPE, when properly inserted, the SUCTION FITTING will protrude through the hole in the pad.
 - b. Fold the FLAP over (in the direction of the hole) securing the Baffle inside the FILTER PAD ENVELOPE.
 - c. CAREFULLY align the CLIP & STANDPIPE ASSEMBLY so that the clip can secure the FLAP and the envelope and the STANDPIPE will align over the SUCTION FITTING protruding through the envelope.
 - d. Tighten the knurled NUT on the STANDPIPE to the SUCTION FITTING protruding through the envelope.
 - e. Repeat DAILY steps 1 a through 1 d .

E. REASSEMBLE

1. CAREFULLY insert the assembled Filter Screen in the bottom of the Filter Tub; then CAREFULLY insert the Crumb Catcher Pan in the Filter Tub with the DRAIN VALVE Docking Flange over the leading edge of the pan.
2. CAREFULLY position the FILTER TUB COVER on the OPEN end of the Filter Tub with the SLOT on the cover seated around the Standpipe Handle Docking Assembly. Then, SECURE the cover to the standpipe assembly by locking the latch on the cover.
3. Position the ASSEMBLED Filter Tub in front of the FILTER TUB GUIDES beneath the fryer; then CAREFULLY and SLOWLY insert the Filter Tub into the fryer using the Standpipe Docking Handle until the MALE In Line Plug on the Standpipe Docking Handle Assembly seats in the FEMALE Bulkhead Coupling adjacent to the Drain Valve Assembly



CAUTION: WHEN ASSEMBLED, ENSURE THERE ARE NO FINGER LOOPS ON THE STANDPIPE SIDE OF THE FILTER.

II. WEEKLY

- A. Perform daily cleaning steps B through D.
- B. Boilout fryer. If using mesh screen place the upper and lower FILTER SCREENS in the fryer with BOIL-OUT SOLUTION for cleaning. BOIL-OUT the fryer vat according to instructions contained in the cleaning manual provided by your chemical supplier.




CAUTION: DO NOT PLACE THE BAFFLE OR STANDPIPE IN THIS SOLUTION!!!


- C. After the filter screens have been cleaned in the Boil-Out Solution, ENSURE they are THOROUGHLY sprayed with a solution of 1 PART vinegar to 25 PARTS of water to NEUTRALIZE the boil-out solution, then allow the screens to air dry. NOTE: any residue of boil-out solution on the filter screens could cause the rapid break-down of the shortening.
- D. Reassemble the “Micro-Mesh stainless steel filter according to DAILY steps D1f through D1.
- E. Place the CRUMB CATCHER PAN and SLUDGE CATCHER SCREEN in the fryer with the Boil-Out Solution for cleaning, and after they are cleaned, ENSURE they are sprayed with a solution of vinegar/water as described in WEEKLY above.
- F. THOROUGHLY clean the Filter Tub, Cover and Sludge Catcher Pan with HOT SANITIZER SOLUTION and allow them to air dry.
- G. Re-assemble and install the Filter Tub according to the FILTER TUB ASSEMBLY AND INSTALLATION section of this manual.

FRYER OPERATION

A. GENERAL
The Model PAR-3-18HE CE gas fryer is equipped with an Ultrastat 23 Cooking computer. Mounted on the fryer's Temperature control panel are the following: fryer ON/OFF switch, **AMBER** Power indicator lamp and **RED** Burner indicator lamp. The Electric and Manual Gas valves, Ignitor Rod and Module as well as the High-Limit Temperature switch are located behind the Service Access door. The Hard Docking Filtration system and Drain levers are also located behind the service access door.

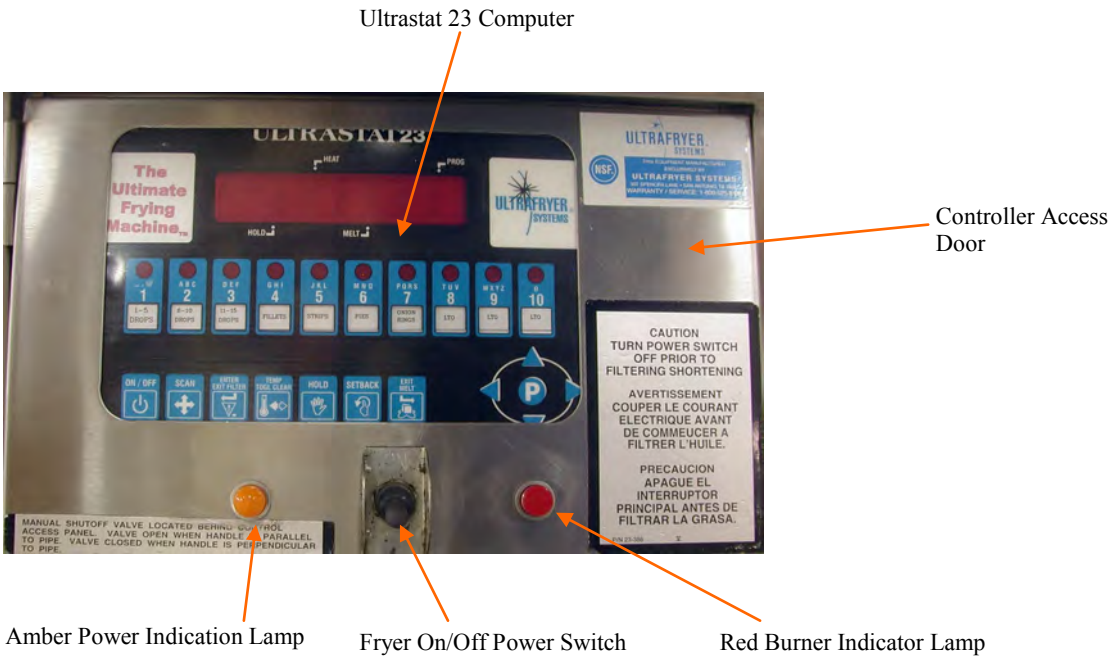

PAR-3-18HE CE GAS FRYER
CONTROL PANEL

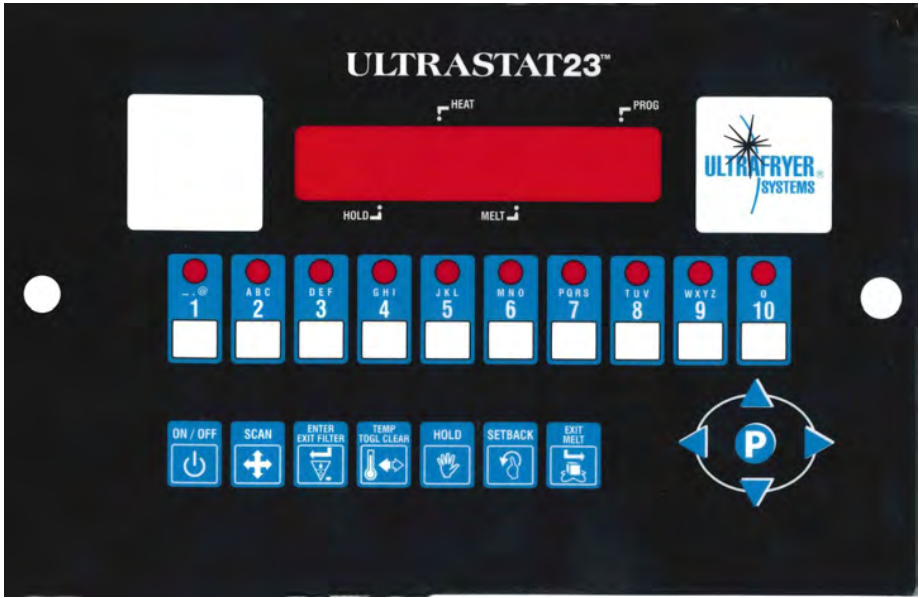


B. ULTRASTAT 23 COOKING COMPUTER

The Ultrastat 23 Cooking Computer is connected to the fryer's electrical system to serve as its thermostat as well as providing heat control, status information and product cook timer. When the computer is in operation it will DISABLE the fryer if the drain valve is OPENED.

This cooking computer is capable of cooking up to ten (10) different products; each of which can be programmed to be cooked from one (1) to ten (10) different temperature at different times in a cook cycle. In addition, the operator can program the ULTRASTAT 23 computer to cook products under "FLEX" or "STRAIGHT" timing modes. When programmed for "FLEX" time mode the computer will adjust the actual cook time taking into consideration the temperature variation due to load size, initial product temperature, product moisture content, and other factors that affect the cook cycle. Under "STRAIGHT" time mode, the product is cooked at a specified temperature for the length of time programmed without adjusting for these variations. Operation of the ULTRASTAT 23 cooking computer is covered in the Computer Instructions Manual PN 30A216 provided with the fryer.

C. COMPUTER PANEL KEY DESCRIPTIONS

1. HOLD LAMP
When lit (bright) indicates a product hold time is being tracked.
2. HEAT LAMP
When lit (bright) indicates the computer is calling for heat.
3. DISPLAY
Displays modes, functions and operations of the computer.
4. MELT LAMP
When lit (bright) indicates the computer is in the melt cycle.
5. PROGRAM LAMP
When lit (bright) indicates the computer is in the program mode.
6. ON/OFF KEY
Turns the computer ON and OFF when the fryer power switch is in the ON position and the drain valve lever is in the closed UP position.
7. PROGRAM KEY
a. In “operating” mode, allows access to the programming mode.
b. In “programming” mode, allows access to the operating mode and general navigation function.
8. SCAN KEY
a. In “operating” mode, displays the remaining cook time on every product currently in a cook cycle and lights the respective products “LED” for 2 seconds.
b. In “programming” mode, steps to the next function to be programmed.
9. ENTER EXIT FILTER KEY
This key will force a filter the fryer into the filter mode. This key is an optional feature.
10. TEMP/TOGGLE CLEAR KEY
a. In “operating” mode, displays the actual temperature followed by the programmed “set” temperature.
b. In “programming” mode, allows the user to “toggle” (switch) between choices in an entry field and “clear” values from a data field.
11. HOLD KEY
a. In “operating” mode, used to view remaining hold times.
12. SET BACK
a. In operating mode forces setback . Display will show “setback” and appliance will be controlled to **setback** temperature instead of **setpoint** temperature.
13. EXIT/MELT KEY
a. In “operating” mode, used to manually exit the shortening melt cycle.
b. In “programming” mode, used to enter numerical value 0.
14. PRODUCT LED
a. When lit (bright) in the “operating” mode, identifies the product data being displayed.
b. When lit (bright) in the “programming” mode, identifies the product being programmed.
15. PROGRAMMING AND PRODUCT COOK KEY
a. In “operating” mode, used to start and stop a product’s cook cycle.
b. In “programming” mode, used to enter numerical values 1 to 10.

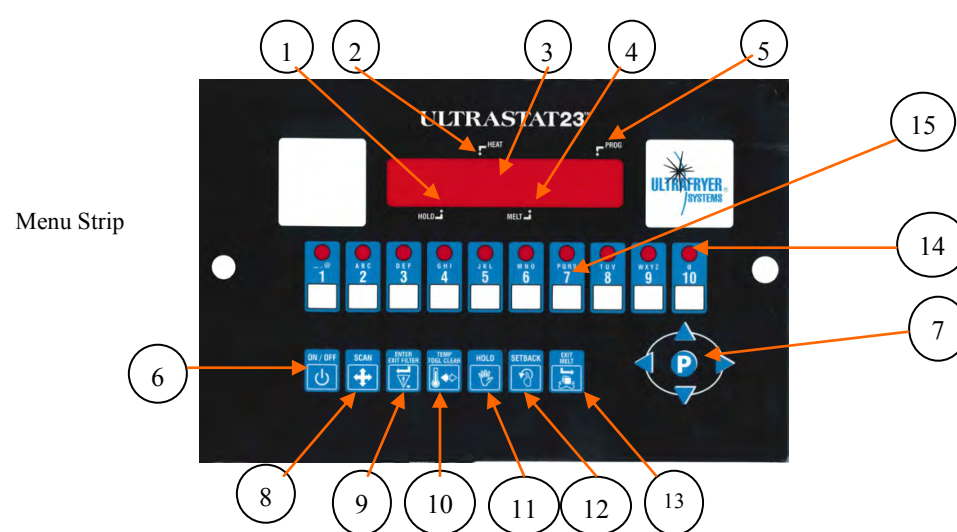


D. DISPLAY DESCRIPTIONS

Ultrastat 23 Programming Guide


1

Turn Toggle ON/OFF switch to ON position and amber power indicator lamp will illuminate. Then press power ON/OFF key.




2

Push and hold the "P" key for 3 seconds to enter PROGRAMMING MODE. PROGRAM will appear in display.




3

Push "P" key the second time to display CODE. Enter "1724" and push the "P" key. RECIPE will display.




4

Push "P" key and "PRODUCT" will display. Hit product key you want to program and hit "P" key.




5

Display shows "ALL". Push "P" key to program each function and "NAME" appears. To change hit the "DOWN ARROW" and scroll to find the word you want in the library. Then push the "P" key to enter it and go to the next item.




6

"TIME 1" will display. To change the time hit "TOGGLE CLEAR" index the time you want on the number pad and press the "P" key to save.




7

"TEMP 1" will display. To change hit "TOGGLE CLEAR" and key in the amount you want and hit the "P" key.




8

"FLEX" or "STRAIGHT" time will appear. To change from one to the other, hit the left arrow key. Then hit the "P" key to save it.




9

Display shows "TIME 2". Repeat steps 6, 7, and 8 for each profile. After the last profile, display will show "ALARM TIME 1".




10

To change "ALARM TIME 1" hit "TOGGLE CLEAR" and index what you want on the number keys and hit the "P" key and the display will show "ALARM NAME"




11

To change "ALARM NAME" hit "DOWN ARROW" and scroll until you find the name you want. Then hit the "P" key. Repeat for alarm 2 and 3 if applicable.




12

Display will show "HOLD TIME 1". For most applications this is not used so exit at this point. To exit press the "DOWN ARROW" key repeatedly until "EXIT" shows on the display. Then hit the "P" key. "PRODUCT" will show on the display.



13

Then hit the "UP ARROW" key and display will show "EXIT". Hit the "P" key and display shows "RECIPE". Hit the "UP ARROW" again then hit "P" key and "PREHEAT" or "READY" should appear. You are now out of program mode and ready to operate with the latest changes.



E. ULTRASTAT 23 START-UP AND COOKING COMPUTER OPERATION



- NOTES: 1) The computer will keep the fryer in the MELT CYCLE until the EXIT MELT button is manually depressed.
- 2) The computer CANNOT be taken out of the SHORTENING MELT MODE until the shortening temperature reaches the MELT LIMIT TEMPERATURE. The Melt Limit Temperature is factory set for a HIGH exit temperature (135°F / 57°C) or a LOW exit temperature (100°F).

The following are abbreviated operating procedures for a fryer equipped with an Ultrastat 23 Cooking Computer. The attached Ultrastat 23 Ultrafryer Computer Operating Instructions, Manual PN 30A216, contains DETAILED Operating, Filtering, Boil-Out and Programming Instructions.

1. START-UP and COOKING

Safely start-up a gas fryer equipped with an Ultrastat 23 Cooking computer as follows:

1. ULTRASTAT 23 START-UP - Safely start-up a gas fryer equipped with an Ultrastat 23 Cooking computer as follows:

STEP	ACTION	RESPONSE
1	ENSURE the drain valve lever on the fryer is in the CLOSED position, shortening is at the proper level, then turn the fryer ON/OFF switch to the on position.	A. The AMBER Power lamp beside the ON/OFF switch will LIGHT. B. The ignitor module will turn on and ignite the pilot flame.



CAUTION: PRIOR TO PROCEEDING TO STEP 2 VISUALLY CHECK THAT THE HEAT EXCHANGER IS COVERED WITH AT LEAST 2" (51 mm) OF SHORTENING AND THE PILOT FLAME IS LIT.

2.

2	Turn the Computer ON by depressing the computer ON/OFF button.	A. The MELT lamp will LIGHT to indicate the computer is in the SHORTENING MELT MODE. B. The HEAT lamp on the computer and the RED heat mechanism indicator lamp on the fryer will cycle ON and OFF indicating the heat mechanism is periodically being turned ON and OFF to gently heat the shortening.
3	Once the Melt Limit Temperature is reached depress the EXIT MELT BUTTON on the computer to cancel the SHORTENING MELT MODE.	A. LO will appear in the computer display indicating shortening temperature is more than 10°F (5°C) below the set-point temperature. B. The HEAT lamp on the computer and the RED heat mechanism indicator lamp will remain ON until the set-point temperature is reached.
4	When “Ready” appears in the Computer display indicating the SET-POINT TEMPERATURE of the shortening has been reached, a COOK cycle can be initiated.	A. Stir the shortening several times to ensure that all the shortening has reached the set point temperature.

F. ULTRASTAT 23 COOKING COMPUTER PROGRAMING

Program the Ultrastat 23 Cooking Computer according to the, Computer Operating Instructions Manual, (PN 30A216) provided with the Fryer.



NOTE: PROGRAMMING OF AN ULTRASTAT 23 COOKING COMPUTER SHOULD ONLY BE PERFORMED BY A STORE MANAGER OR AREA SUPERVISOR.

A. GENERAL COOKING

Most products should be cooked with a shortening temperature about 350°F (177°C); however, each product should be cooked at the LOWEST temperature that produces a high quality product while obtaining maximum usage of the shortening.

I – DO USE A HIGH QUALITY SHORTENING TO ACHIEVE A CONSISTENT QUALITY PRODUCT AND LONG TERM SAVINGS

II – DO NOT SALT PRODUCTS OVER THE FRYER AS SALT QUICKLY DETERIORATES THE SHORTENING AND FLAVORS OTHER PRODUCTS COOKED IN THE SAME SHORTENING

III – DO FILTER SHORTENING AFTER THE LUNCH AND DINNER RUSH AND MORE OFTEN IN A HIGH SALE VOLUME STORE; AND BOIL-OUT THE FRYER EVERY 7 DAYS



NOTE: Startup steps 1, 2, 3, and 4 will have to be repeated each time any of the following occurs:

DRAIN VALVE IS OPEN. FRYER TOGGLE ON/OFF SWITCH IS TURNED OFF TO FILTER SHORTENING OR BOIL-OUT A FRYER. FRYER TOGGLE ON/OFF SWITCH IS TURNED OFF AT CLOSING OR ANY OTHER REASON.

When the Computer is taken out of the SHORTENING MELT MODE each morning, shortening in the fryer vat will be heated to its SETPOINT temperature **HEATING** will appear in the display to indicate the shortening temperature is MORE than 20°F (-6.6°C) BELOW the setpoint temperature. When shortening temperature rises to the SETPOINT temperature, **READY** will appear in the display indicating a COOK CYCLE can be started.

B. STARTING A COOK CYCLE


To start a cook cycle simply press the product key for the (Ø) product you wish to cook. If the product is programmed, the correct cooking time will be displayed “1200” (example) and this time will immediately start to count down in minutes and seconds. If “DON’T” is displayed immediately and the unit starts to signal, the key being operated is not programmed. If correctly programmed, it will count down “:00” to followed by and start to signal. To turn this signal OFF and reset the Computer, press Ø the product key used to start the COOK CYCLE.

C. CANCELLING A COOK CYCLE

If a cook cycle was inadvertently started it may be cancelled two (2) ways:

- 1) Press and hold the same product key (Ø) used to start the cook cycle for 4 SECONDS. This prevents an accidental start of a cook cycle (Ø) while a product is being cooked.
- 2) A cook cycle can be CANCELLED at any time by turning the fryer ON/OFF Switch to the OFF position.

Press product key

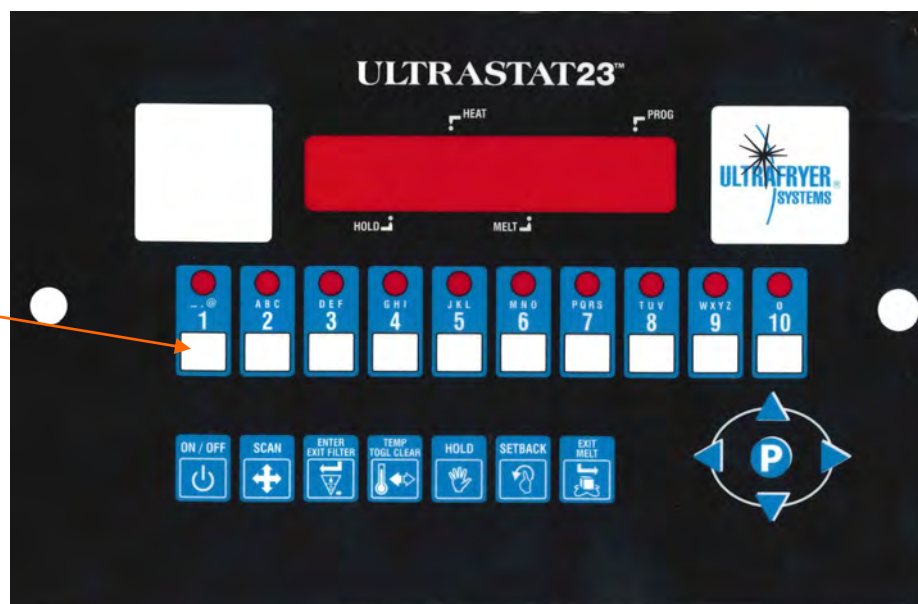


FILTER TUB ASSEMBLY & INSTALLATION

A. FILTER TUB ASSEMBLY

ENSURE all components of the filter tub have been thoroughly cleaned and that the Filter Screen has been assembled according to the CLEANING Section of this manual; then assemble the filter tub as follows:

1. Connect the KNURLED KNOB to the STANDPIPE DOCKING HANDLE ASSEMBLY; then attach this assembly to the SUCTION FITTING on the Filter Screen. DO NOT OVERTIGHTEN THIS CONNECTION!!!
2. Place the Filter Screen in the bottom of the Filter Tub with the screen butted against the rear wall of the tub.
3. Insert the Crumb Catcher Screen in the Filter Tub with the Drain Valve DOCKING FLANGE and MALE DOCKING PLUG over the leading edge of the pan.
4. Position the FILTER TUB COVER on the open end of the Filter Tub with the SLOT on the cover seated around the Standpipe Docking Handle Assembly. Then, SECURE the cover to the standpipe assembly by locking the latch on the cover.

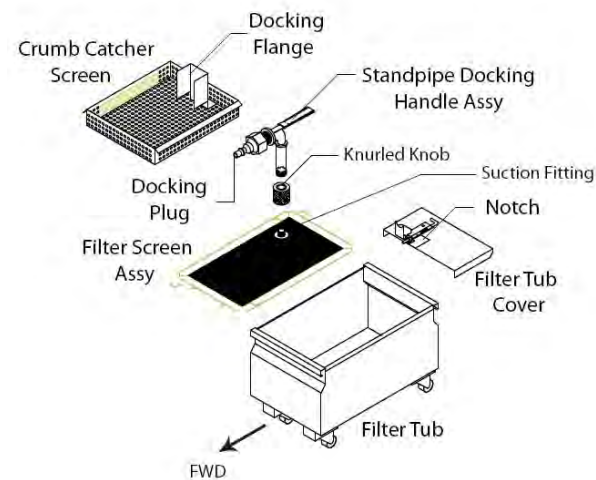


B. FILTER TUB INSTALLATION

Position the ASSEMBLED Filter Tub in front of the FILTER TUB GUIDES beneath the fryer; then CAREFULLY insert the Filter Tub into the fryer using the standpipe handle assembly until the MALE In-Line Plug on the Docking Handle Assembly seats in the FEMALE Bulkhead Socket adjacent to the Drain Valve Assembly.



WARNING!! CRUMBS AND SLUDGE LEFT IN THE FILTER TUB OVERNIGHT ARE A FIRE HAZARD!!

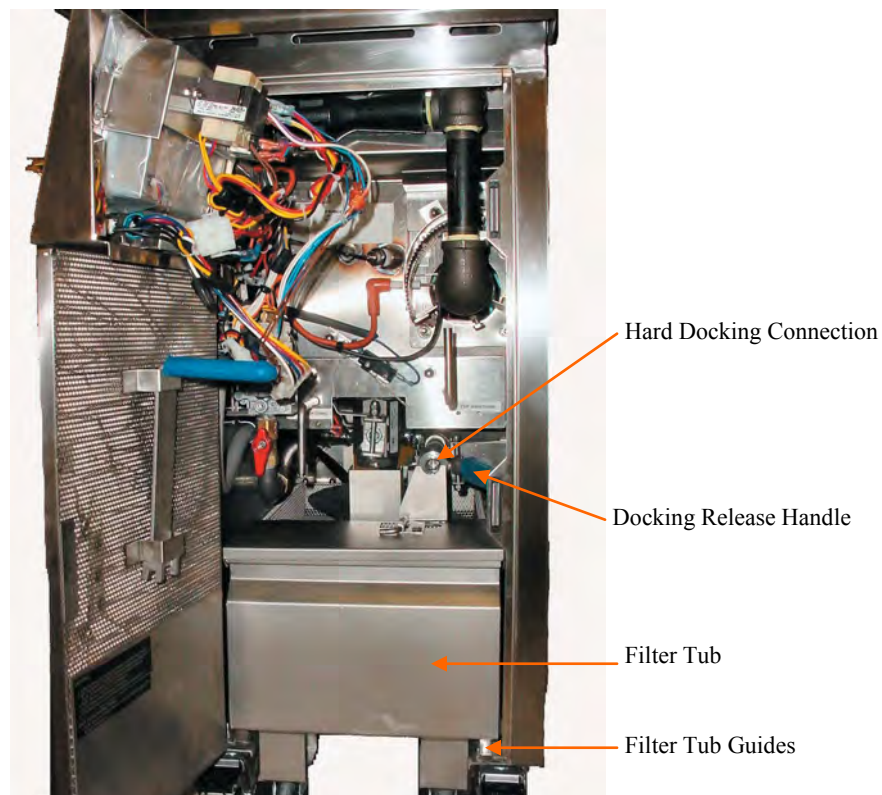

FILTERING AND POLISHING SHORTENING

A. FILTERING SHORTENING

1. Turn the ON / OFF SWITCH on the fryer to OFF, turn the MANUAL GAS VALVE OFF, and ensure the filter tub is properly docked beneath the drain valve.




NOTE: Pull on the filter tub Handle to ASSURE the male docking plug is SEATED in the female bulkhead socket.

2. Place the amount of FILTER AGENT into the fryer vat as prescribed in the cleaning manual provided by your chemical supplier; thoroughly stir the filter agent into the shortening using a skimmer; then skim the shortening to remove any floating crumbs.



CAUTION: PRIOR TO PROCEEDING TO THE NEXT STEP, PUT ON SAFETY GOGGLES, NEOPRENE INSULATED GLOVES AND AN APRON.


3. Carefully attach the drain valve handle to the drain valve; then open the drain valve by turning the DRAIN VALVE HANDLE slightly downward. When the bottom of the filter tub is covered with about two (2) inches of shortening, completely OPEN the drain valve, and while shortening is draining, scrape all sides of the vat to remove encrusted material using the scraper.
4. When all shortening has drained into the filter tub, use the DRAIN ROD to stand the wire rack on one side of the vat.
5. Use the drain rod to pull the sediment on the bottom of the vat towards the valve opening, then use the rod to push sediment through the valve opening.

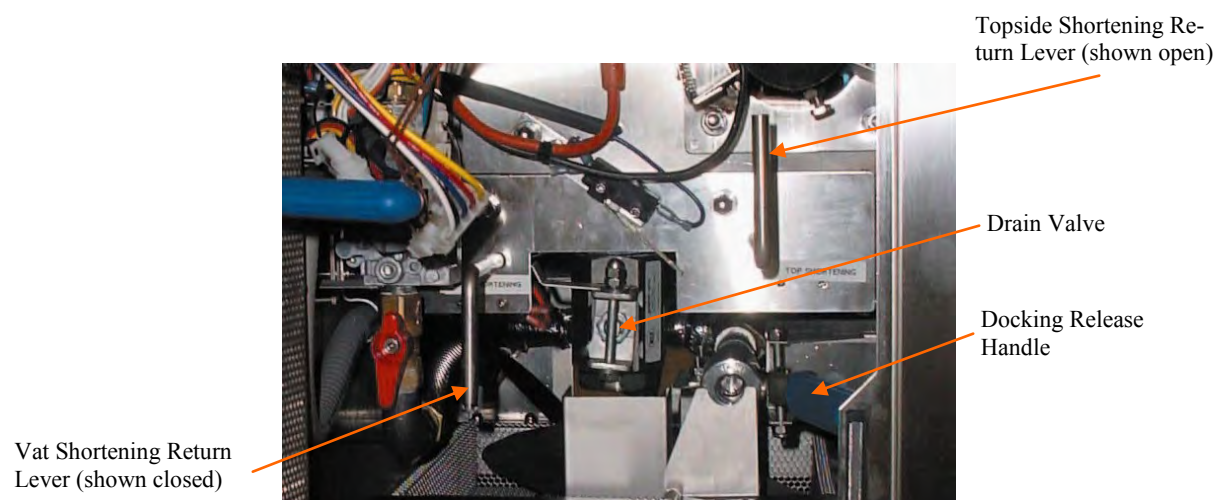

CAUTION: DO NOT ACTIVATE (TURN) THE VAT SHORTENING RETURN LEVER AND TOPSIDE SHORTENING LEVER AT THE SAME TIME! TO DO SO WILL REDUCE SHORTENING FLOW.

6. If there is NO sediment or debris visible on the heat exchanger or bottom of the vat, CLOSE the drain valve; then turn the LEFT HAND Vat Shortening Return Lever 1/4 turn counter clock wise to automatically return shortening in the filter tub through the SWEEP NOZZLE in the bottom of the vat. When all shortening has been returned to the vat, turn the LEFT HAND Vat Shortening Return Lever 1/4 turn clockwise to stop the flow of shortening.
7. If there is considerable sediment and debris on the bottom of the vat, FLUSH this sediment from vat using the Wash Down Hose as follows:
 - a. Leave the drain valve in the OPEN position, CAREFULLY connect the Wash Down Hose Male In-Line Plug to the TOPSIDE FEMALE SOCKET; then place the Wash Down Hose nozzle into vat and hold it firmly against an inner wall so it will not recoil upward when the pump comes on.
 - b. Turn the RIGHT HAND Topside Shortening Return Lever 1/4 turn counter clock wise and hold the hose nozzle at 45° angle from the bottom of the vat causing sediment and debris to bounce off the rear wall and flow towards the drain valve.
 - c. Use the “L” shaped brush to push the sediment through the drain valve to keep the drain clear. Hose off the heat exchanger and vat walls until all sediment and debris has been flushed through the drain into the filter tub.

- d. Turn the RIGHT HAND Topside Shortening Return Lever 1/4 turn counter clock wise; then CAREFULLY remove the Wash Down Hose MALE In-Line Plug from the TOPSIDE FEMALE SOCKET by depressing the Topside Socket Release Knob.
- e. Hang the Wash Down Hose in an up-right position so shortening can drain into a metal container; then proceed to paragraph B 1 below.

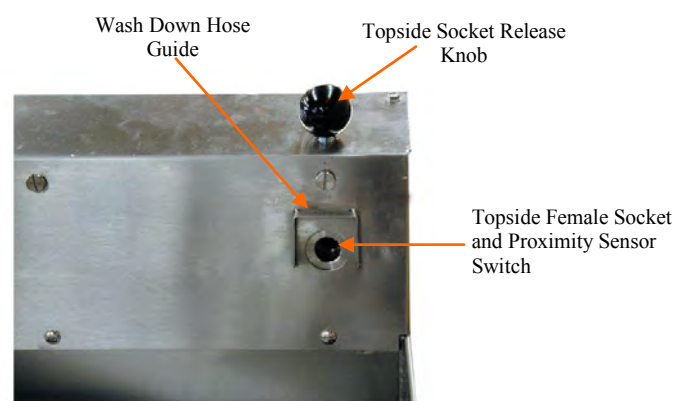

(Basket Hanger Bracket Not Shown For Clarity)

B. POLISHING SHORTENING

1. Set a timer for the amount of time established for POLISHING shortening, then turn the VAT SHORTENING RETURN LEVER 1/4 TURN COUNTER CLOCKWISE to allow shortening to circulate through the system to POLISH the shortening.



CAUTION: DO NOT POLISH THE SHORTENING MORE THAN THE ESTABLISHED TIME AS IT WILL PUMP EXCESS AIR INTO THE SHORTENING CAUSING SHORTENING BREAKDOWN.

2. At the end of the established time, TURN the VAT SHORTENING RETURN LEVER 1/4 TURN CLOCKWISE, turn the DRAIN VALVE HANDLE to the closed UP position; replace the grill in the fryer; then TURN the Vat Shortening RETURN LEVER 1/4 COUNTER CLOCKWISE to automatically return shortening in the filter tub to the fryer vat.
3. When all shortening in the filter tub has been returned to the fryer, TURN the VAT SHORTENING RETURN LEVER, 1/4 TURN CLOCKWISE check and if necessary add fresh shortening so shortening is level with the middle line of the letter "E" in the word LEVEL of the shortening level mark on the rear wall of the fryer.
4. Remove the Filter Tub Assembly by pressing the DOCKING RELEASE HANDLE and pulling the STANDPIPE DOCKING HANDLE ASSY away from the FEMALE Bulkhead Socket adjacent to the Drain Valve; then THOROUGHLY clean, assemble and replace the Filter Tub Assembly in the fryer cabinet.

SHORTENING DISPOSAL, BOIL-OUT, AND REFILL

A. GENERAL

The gas fryer should be BOILED-OUT every 7 DAYS to remove carbon buildup and other encrusted material.

B. SHORTENING DISPOSAL

1. CAREFULLY assemble and install the Filter Tub assembly according to the instructions in the FILTER TUB ASSEMBLY AND INSTALLATION section.



CAUTION: PRIOR TO PROCEEDING TO THE NEXT STEP, PUT ON SAFETY GOGGLES, NEOPRENE INSULATED GLOVES AND AN APRON.

2. Turn the ON/OFF switch and Manual Gas Valve OFF, and ensure the filter tub is properly DOCKED beneath the fryer drain valve.



NOTE: Pull on the filter tub to ASSURE the male docking plug is SEATED in the female bulk head socket.

3. Attach the Drain Valve Handle to the drain valve; then open the drain valve by turning the DRAIN VALVE HANDLE slightly downward. When the bottom of the filter tub is covered with about two (2) inches of shortening, completely OPEN the drain valve, and while shortening is draining, scrape all sides of the vat to remove encrusted material using a scraper.
4. When all shortening has drained into the filter tub, use the DRAIN ROD to place the wire rack on one side of the vat.
5. Use the drain rod to pull sediment on the bottom of the vat towards the drain valve opening and push it through the valve opening.
6. FLUSH sediment and debris from the fryer vat as follows:
 - a. CAREFULLY connect the Wash Down Hose MALE In-Line Plug to the TOPSIDE FEMALE SOCKET and place the Wash Down Hose into the vat and hold it firmly against an inner wall so it will not “recoil” upward when the pump comes ON.
 - b. TURN the Topside Shortening Return Lever 1/4 turn counter clockwise and hold the wand hose nozzle at a 45° angle from the bottom of the fryer causing sediment and debris to bounce off the rear wall of the vat and flow towards the drain valve.
 - c. Use the “L” shaped vat brush to push the sediment through the drain valve to keep the drain clear. Hose off the burner tubes and all walls of the vat until all the sediment and residue at the bottom of the fryer has been flushed through the drain into the filter tub. Then turn the Topside Shortening Return Lever 1/4 turn clockwise.
7. DISPOSE of the shortening in the filter tub as follows:
 - a. Restaurants NOT equipped with a Shortening Disposal System.
 - 1) Place the Wash Down Hose NOZZLE into a METAL container and hold it firmly against an inner wall.
 - 2) TURN the TOPSIDE SHORTENING RETURN LEVER 1/4 TURN COUNTER CLOCKWISE and pump shortening into the metal container.
 - 3) When all shortening has been pumped into the container, TURN the TOPSIDE SHORTENING RETURN LEVER 1/4 TURN CLOCKWISE, remove the Wash Down Hose from the TOPSIDE FEMALE SOCKET and hang the hose in an upright position so shortening in the hose can drain into a container.
 - b. Restaurants equipped with a Shortening Disposal System.
 - 1) SECURELY connect the Shortening Disposal Hose fitting to the TOPSIDE FEMALE SOCKET and connect the fitting on the other end of the hose to the Disposal System connector on the wall.
 - 2) TURN the TOPSIDE SHORTENING RETURN LEVER 1/4 TURN COUNTER CLOCKWISE and pump shortening in the filter tub into the Exterior rendering tank.
 - 3) When all shortening has been pumped into the rendering tank, TURN the APPLICABLE TOPSIDE SHORTENING RETURN LEVER 1/4 TURN CLOCKWISE, remove the Disposal Hose from the TOPSIDE FEMALE SOCKET. Hang the hose in an upright position so shortening in the hose can drain into a container.
8. THOROUGHLY clean and re-assemble the filter tub.

C. BOIL-OUT - Boil-out the gas fryer following the cleaning instructions in the Cleaning Manual provided by your approved chemical supplier. The following are generic procedures:



CAUTION: ONLY USE A COMERCIAL GRADE “NON-CHLORINE” BOIL-OUT COMPOUND.

- 1) Ensure the Drain Valve handle is in the closed (UP) position, then add water to the fryer vat 1"(25mm) BELOW the middle line of the "E" in the word LEVEL on the rear wall of the vat.
- 2) Add the amount of BOIL-OUT COMPOUND to the fryer vat as specified in the Cleaning manual provided by the chemical supplier.
- 3) Turn the ON/OFF switch and Manual Gas valve for the fryer vat to the ON position; then depress the Computer ON/OFF key to the ON position.



NOTE: The drain lever must be in the closed (UP) position to turn the computer ON.

- 4) Place the Computer in the BOIL MODE by pressing the following "P" key for 3 seconds "program" will be displayed. Press the up or down arrow key until "Boil" is displayed. Then press "P" key again.



NOTE: "BOIL" will appear in the Computer display and the Computer will turn the heat mechanism ON and OFF to gradually heat and maintain the boil-out solution to 190°F (88°C).

- 5) When the boil-out solution reaches 190°F (88°C) the timer is set for 30 minutes. Frequently scrub the sides, front and rear of the fryer vat with a long handled scrub brush.
- 6) After the boil-out solution has 'BOILED' for 30 minutes and the timer sounds, press and hold the "P" key for 3 seconds in to EXIT BOIL MODE:
- 7) Turn the ON/OFF Switch and the Manual Gas Valve for the fryer to the OFF position and then CAREFULLY dispose of the boil-out solution in the fryer into a floor drain.



WARNING: DO NOT USE THE FILTER PUMP TO REMOVE WATER FROM THE VATS AS THIS WILL CAUSE PREMATURE PUMP FAILURE AND VOID THE PUMP WARRANTY.

- 8) Use a scrubbing pad to remove carbon buildup from the top of the heat mechanism. To remove carbon build-up on the sides and bottom of the heat mechanism; slide one end of a stropping pad under each section, grasp that end with a pair of tongs, and rock the pad up and down along the length of each section until all encrusted material has been removed.
- 9) Rinse the fryer with hot water until the water coming out of the drain valve is clear.
- 10) Mix a solution of ONE PART vinegar to 25 PARTS of water. Place this mixture into a one gallon garden pressure sprayer; and THOROUGHLY spray this solution onto the SIDES, HEAT EXCHANGER, and BOTTOM of the fryer vat to neutralize the Boil-Out Compound.



NOTE: Boil-Out Compound will cause shortening to break down rapidly if it is not neutralized.

- 11) After the neutralizing solution has drained from the vat and the vat has been dried with a lint free cloth, turn the drain valve to the CLOSED (UP) position.



WARNING: ENSURE THE VAT IS COMPLETELY DRY BEFORE ADDING AND HEATING NEW SHORTENING. HOT SHORTENING AND WATER CAN CAUSE AN EXPLOSIVE REACTION

D. SHORTENING REFILL

1. LIQUID SHORTENING

When using liquid shortening, fill the fryer with cool shortening 1/2"(13mm) BELOW the "E" in the word LEVEL. When heated ensure the shortening level is even with the middle line of the "E" in the word LEVEL. Add shortening as needed.

2. SOLID SHORTENING:

- a. Cut a block of solid shortening into small pieces.
- b. Place small pieces of solid shortening EVENLY on top of the HEAT EXCHANGER TUBES or THOROUGHLY PACK these pieces of solid shortening between, below and above the HEAT EXCHANGER TUBES. While packing solid shortening is messy and time consuming, it is the safest and fastest way to melt solid shortening.
- c. Continue adding solid shortening as follows:
 - 1) Place small pieces of solid shortening into a fry basket.
 - 2) CAREFULLY lower the basket into the fryer vat.
 - 3) GENTLY turn the basket to allow these pieces of solid shortening to float away.
 - 4) Repeat the above steps until liquid shortening is even with the middle line of the "E" in the word LEVEL of the shortening level mark on the rear wall of the fryer vat.

TECHNICAL ASSISTANCE, ORDERING INFORMATION

TECHNICAL ASSISTANCE - Contact an authorized service agent or the Customer Service Department, Ultrafryer Systems at 1-800-525-8130 for technical assistance.
E-Mail technical assistance at: techserv@ultrafryer.com

B. ORDERING INFORMATION:

1. **REPLACEMENT PARTS** - Provide the following information when ordering replacement parts by phone, fax or mail:

Your company name and phone number
Your company purchase order number
Bill-to address
Ship-to address
Quantity desired
Part number and description of the desired-item Your name or signature of authorized-buyer


Phone in order to: 954-202-7336
FAX order to: 954-202-7337
Mail order to: Greenfield World Trade
U.S. Office
3355 Enterprise Ave. Suite 160
Ft Lauderdale, FL 33331
Website: www.Greenfieldworld.com

2. **DAMAGES** - Ultrafryer Systems is not responsible for damage occurring in transit. All deliveries must be inspected for damage to shipping containers prior to departure of the delivering carrier. Any damage must be notated on the receiving document to facilitate filing of freight claims. Carriers must be notified immediately and freight inspections must be requested from the carrier. Ultrafryer Systems can and will gladly assist you in preparing and processing of the necessary claims only if proper notification has been accomplished on the carrier delivery document. Damaged equipment and or containers must be available for the claims inspector to inspect.

PARTS IDENTIFICATION

A. PARTS IDENTIFICATION
Locate the part on the following sketches and note the index number i.e, 3, 6, etc; then obtain the part number and description for that index number on the page facing the sketches. Use that part number when ordering a replacement part.



ULTRAFRYER MODEL PAR-3-HE CE GAS FRYER
FRONT VIEW

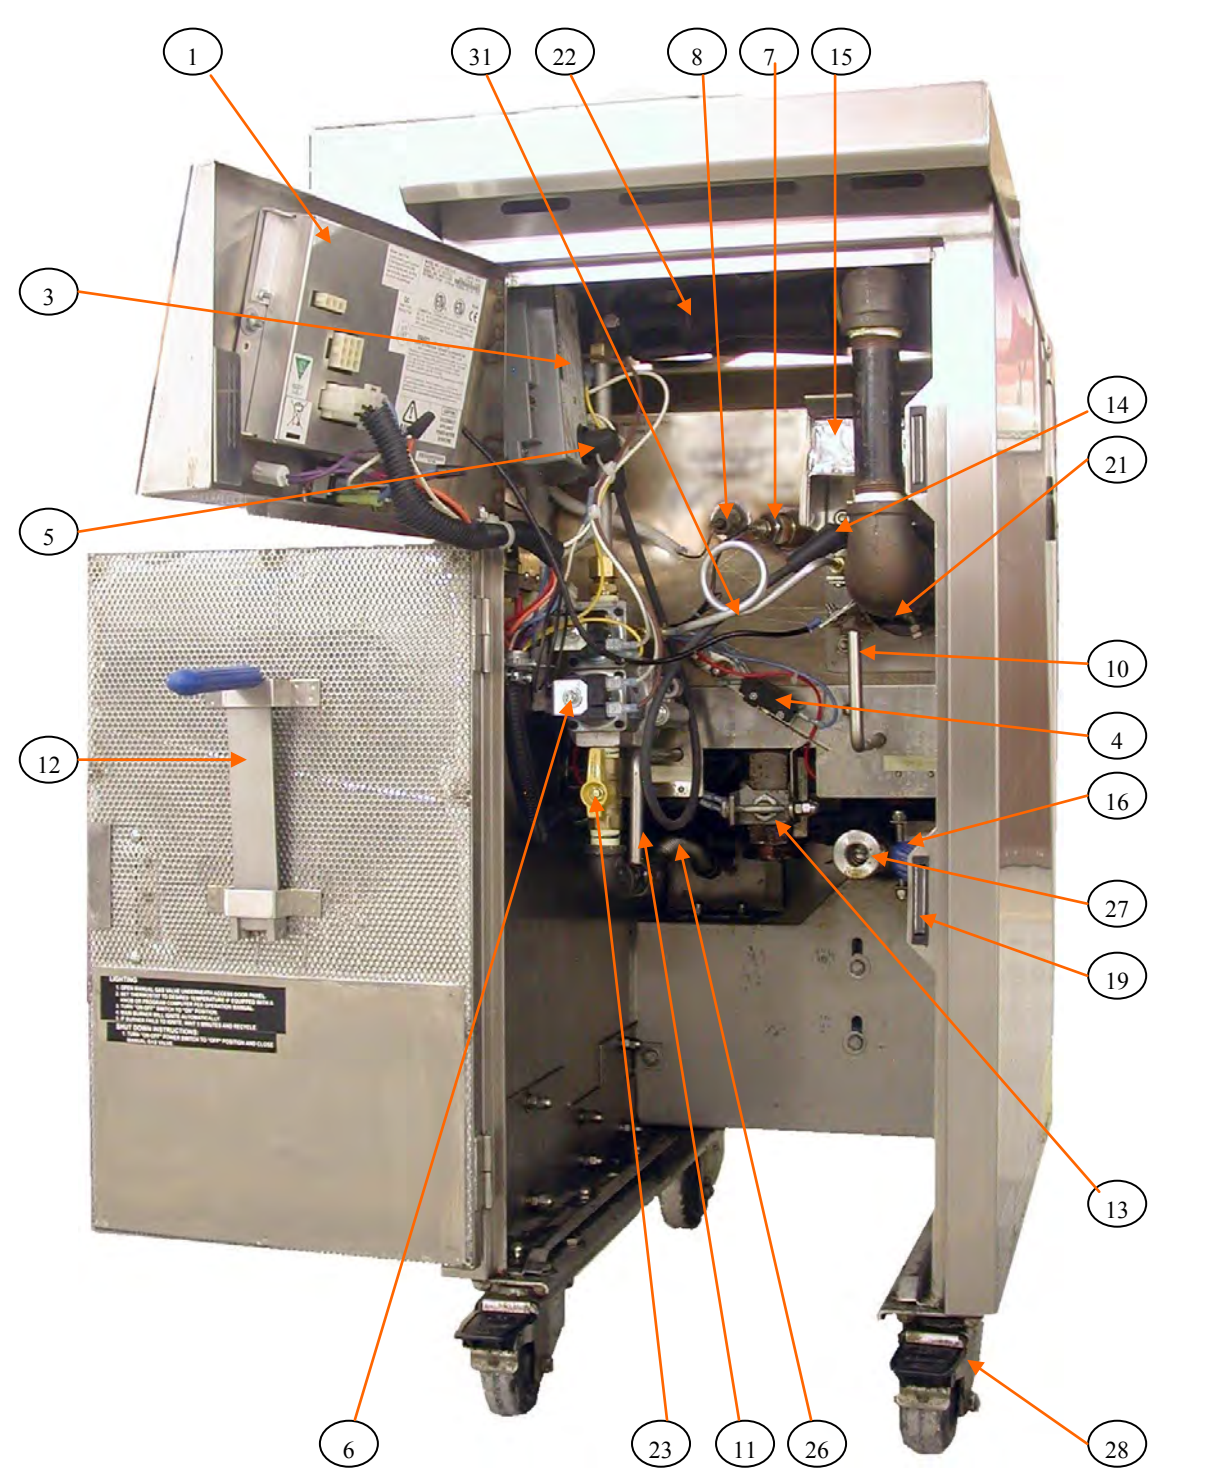

	ITEM	DESCRIPTION	P/N
	1	Computer, Cook FAST Meridian	22A436
*	2	18" Model PAR-3-H CE Vat Cover	19A731
	3	Spark Ignitor Module	18A316
	4	Drain and Filter Valve Lever Microswitch	18A064
	5	Ignitor Rod Cable with 1/4 Stake-on Suppression Type	18A317
	6	Electric Gas Combination Control Valve with Pilot Adjust Valve.	18A314
	7	Probe, Temperature sensing Thermistor	18A006
	8	Switch, Hi-Limit for Gas Fryer ((Order a 1/4" (5mm) Compression Fitting PN 24247 when ordering this item.))	19A144
*	9	18" Model PAR-3-H CE Agitator Baffle Weldment	19A474
	10	18" Model PAR-3-H CE Vat Shortening Return Lever	19B512
	11	18" Model PAR-3-H CE Topside Shortening Return Lever	19B513
	12	Drain Ball Valve Handle	19A558
	13	Drain Ball Valve Assembly	19A564
	14	Spark Ignitor Rod Assembly (Set Rod Gap to 5/32" (4mm) prior to installation)	12C196
	15	Pilot light Heat Channel	19C271
	16	Docking Release Handle	19A948
*	17	18" Model PAR-3-H CE F/F Basket Hanger Bracket	19B313
*	18	Chrome Door Pull	22005
	19	Magnetic Door Catch	22407
*	20	18" Model PAR-3-H CE Fryer Vat Grill	22704
	21	Ferrofix Nozzle Eclipse #GF-1 Burner	22A112
	22	Cast Iron Venturi	22A118
	23	1/2" (13mm) ID Manual Gas Valve	24326
*	24	Orifices	Country Specific
*	25	Orifice Plug Holder	24A105
	26	1/2" (13mm) MIP x 1/2" (13mm) MIP Flexible Gas Line 18" (457mm) Long	24A138
	27	1/2" (13mm) FPT S/S Female Bulkhead Coupling w/Raised Button Release	24A209
	28	Medium Duty 3" (76mm) Front Caster w/Brake for all Model PAR-3-H CE Fryers.	28A010
*	29	Orifice, Pilot BCR-18 Natural Gas	18608
*	30	Orifice, Pilot BCR-12 Propane/Butane	18609
	31	Tube, Siphon for Pilot Gas 18"	19C412
*	32	"L" shape tip Cleaning Brush	29A044
*	33	Drain Clean-out Rod	12569

* NOT SHOWN

ULTRAFRYER MODEL PAR 3-H FRYER REAR VIEW

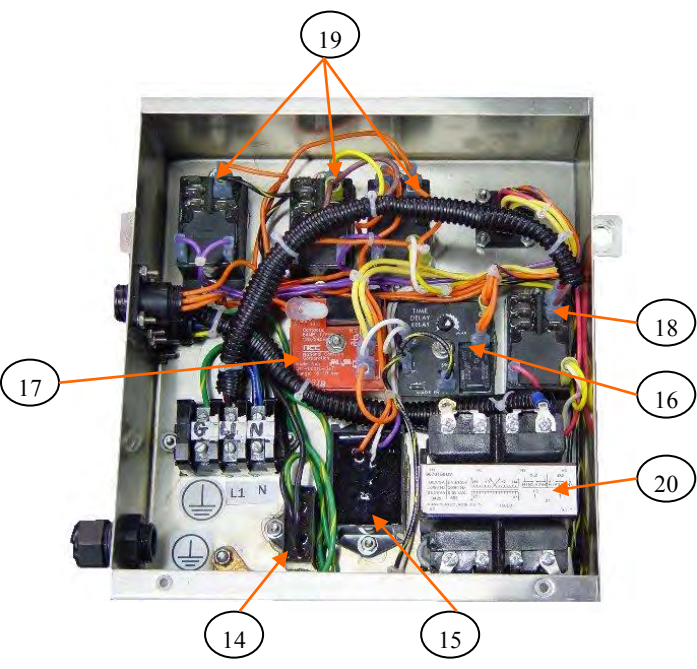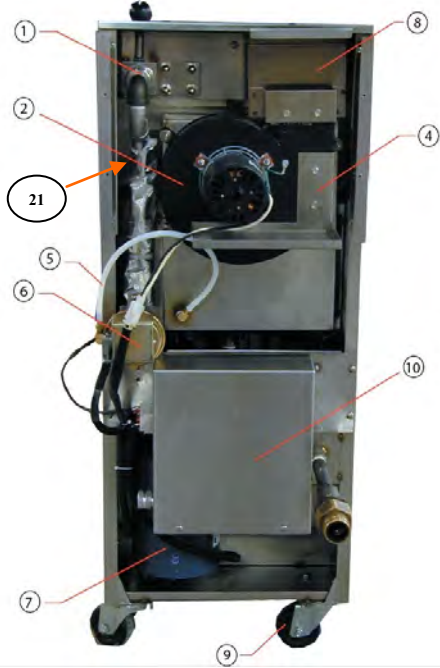


ELECTICAL BOX PN 12C195


	ITEM	DESCRIPTION	PN
	1	1/2" (13mm) FPT S/S Female Bulkhead Coupling w/Raised Button Release	24A209
	2	18" Model PAR-3-H CE 220 Volt 60 HZ Exhaust Blower Motor Kit w/Mounting Bracket	19A548
	3	18" Model PAR-3-H CE Exhaust Blower Motor Gasket	19A546
	4	Exhaust Blower Motor Drip Pan	19A527
	5	3/16" (5mm) ID 5/16" (8mm) OD Air Pressure Switch Plastic Tube rated for 500° F (260°C)	24A068
	6	Air Pressure Switch	18A291
	7	230/240 VAC 50/60 Mhz motor 5.5 GPM (19.25 LPM) pump	24A206 24329
	8	18" Model PAR-3-H CE 53/4" x 8" High (146 x 208mm) Rectangular Flue Tube with deflector	19B312
*	9	Medium Duty 3" (76mm) Rear Caster w/out Brake	28A011
	10	Electrical Box Assy	12C195
*	11	240 Volt 75 Watt Silicon Heater 5' (1524mm) Long	23401
*	12	1/2" (13mm) Pump Ball Valve	24-036
	13	Rear Exit Weldment Baffle	19A463
	14	240 Volt Surge Protector	18A063
	15	Filter Circuit	12C191
	16	Relay, Delay on Break 24 VAC	18A099
	17	Relay, Delay on make 24 VAC	23A232
	18	24 VAC DPDT Relay	18A076
	19	24 VDC DPDT Relay	18A301
	20	Transformer, Step Down 240 / 24 VAC	18A066
	21	Thermostat, OOR SPST for Heater strip	18A315

* NOT SHOWN

PAR-3-HE CE DOOR ASSEMBLY

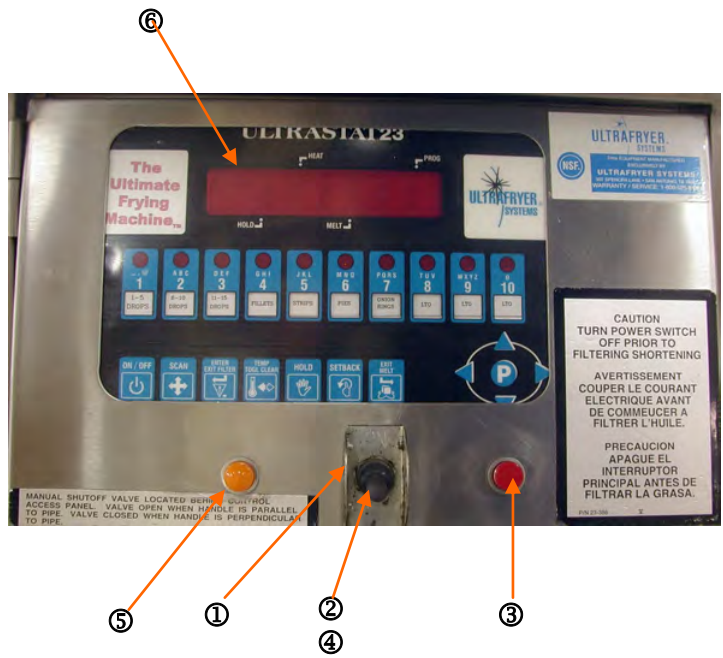


MICROMESH S/S FILTER SCREEN ASSEMBLY WITH STANDPIPE & DOCKING ASSEMBLY
PN 12B113

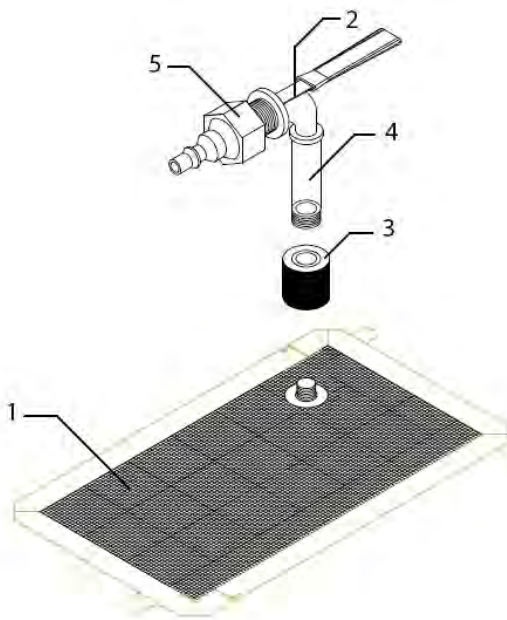

ITEM	DESCRIPTION	PN
1	On/Off Switch Guard.	18129
2	24 Volt 6 Amp SPDT ON/OFF Switch.	18A287
3	24 Volt 1/3 Watt Snaplight w/ RED Lens.	23A103
4	ON/OFF Switch Protective Boot.	23402
5	24 Volt 1/3 Watt Snaplight w/ AMBER Lens.	23A101
6	Ultrastat 23 Cooking Computer	22A436


ITEM	DESCRIPTION	PN
1	Micro-Mesh S/S Filter Screen	21A278
2	Handle Assy Weld 1/2"(13mm) Street Elbow	19B442
3	Top Compression Cap (Knurl Knob)	24369
4	3/8"(10mm) x 9" (229mm) Black Iron Nipple	24417
5	1/2"(13mm) S/S Locking Seal Inline Plug	24A208

PAR-3-HE CE EZ DOCK FILTER TUB ASSEMBLY
14" With Micromesh Filter PN 12B112
14" With Magnepad Filter PN 12B177

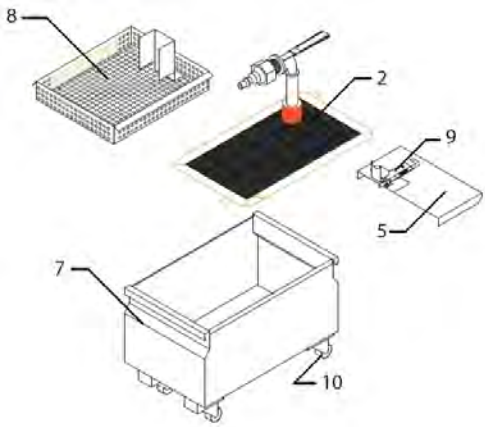


	ITEM	DESCRIPTION	PN
	1	Filter Tub Scraper	12567
	2	Micromesh S/S Filter Screen Assembly with StandPipe & Docking Assembly	12B113
*	3	Magepad Magnesol Impregnated Filter Pad with Standpipe and Docking Assembly	12B178
*	4	Wash Down Hose Assembly	12B115
	5	Filter Tub cover with hinge latch and Proximity sensor actuator for 18" Filter Tub	19B309
*	6	Proximity Actuator Sensor	18A059
	7	18" Model PAR-3-H CE Filter Tub	19B309
	8	18" Model PAR-3-H CE Crumb Catcher Screen	19B308
	9	RH S/S Hinge Latch	22479
	10	Medium Duty Caster	28A005

* NOT SHOWN NOTE: Items 5,7 and 9 come with 19B309

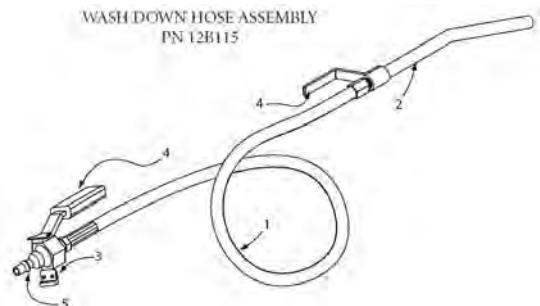


ITEM	DESCRIPTION	PN
1	6' (1829mm) Wash Down Hose w/Fittings	12541
2	Wash Down Hose & Nozzle Assembly	12675
3	Proximity Sensor Actuator	18A059
4	Cool II Handle	22734
5	1/2"(13mm) S/S Locking Seal Inline Plug	24A208

MICRO-MESH S/S FILTER SCREEN
PN 21A278

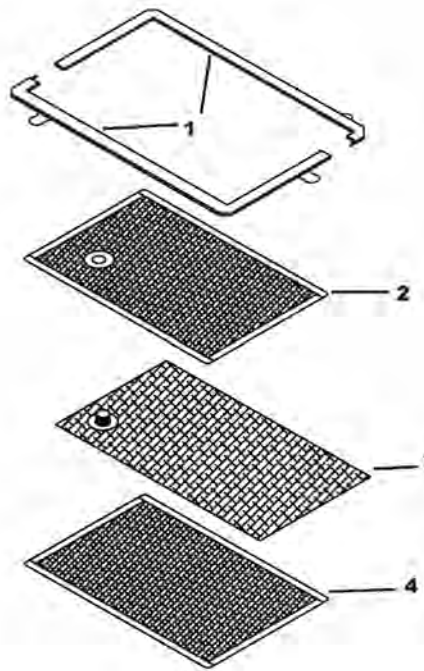


ITEM	DESCRIPTION	PN
1	Replacement Frame Set	21A275
2	Replacement "Upper" Screen	21A285
3	Replacement Baffle Assembly	21A286
4	Replacement "Lower" Screen	21A287

MAGEPAD MAGNESOL IMPREGNATED FILTER PAD
WITH STANDPIPE AND DOCKING ASSEMBLY
PN 12B178

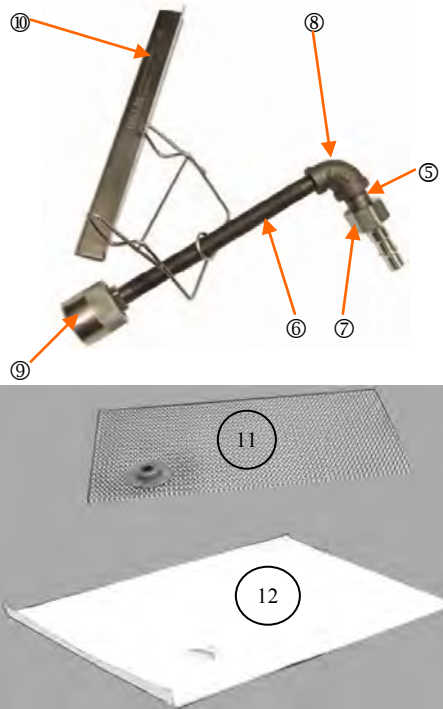

ITEM	DESCRIPTION	PN
5	1/2" (13mm) Black Iron Close Nipple	24003
6	3/8"(10mm) x 7" (177.8mm) Black Iron Nipple	24470
7	1/2" (13mm) S/S Locking Seal Inline Plug	24A208
8	1/2" (13mm) Handle Assy With 90° Black Iron Elbow	19A598
9	Top Compression Cap (Knurl Knob)	24A153
10	11" (279mm) Standpipe Clip	29A052
11	9 3/8" x 16 7/8" (238mm x 429mm) Baffle	29A060
12	11" x 18 1/4" (279mm x 464mm) Filter Pad	29A059
12	Case of (PN 29A059) Filter Pads	29A057
KIT	11" x 18 1/4" (279mm x 464mm) Baffle Kit consists of items 9,10&11	29A058

WIRING DIAGRAM

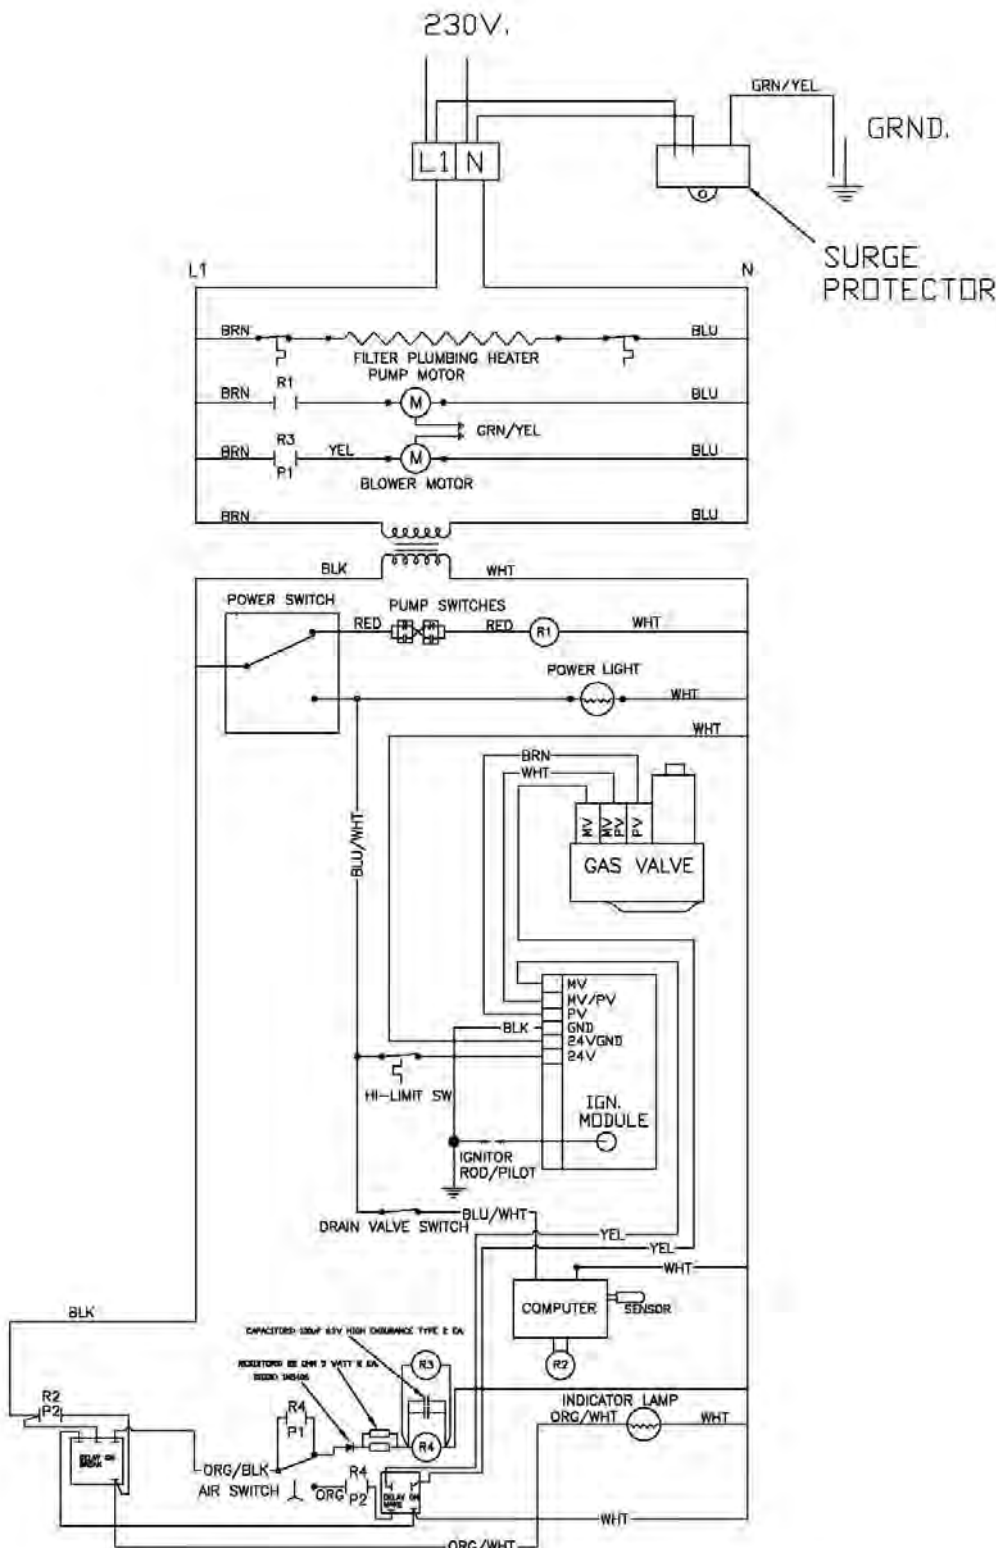

PAR-3-H CE GAS FRYER W/ U23 COOKING COMPUTER

THIS PAGE INTENTIONALLY BLANK